



AD NO. \_\_\_\_\_  
DTC PROJECT NO. 8-CO-160-UXO-021  
REPORT NO. ATC-9797



STANDARDIZED  
UXO TECHNOLOGY DEMONSTRATION SITE  
WOODS SCORING RECORD NO. 902


SITE LOCATION:  
U.S. ARMY ABERDEEN PROVING GROUND

DEMONSTRATOR:  
SKY RESEARCH, INC.  
445 DEAD INDIAN MEMORIAL ROAD  
ASHLAND, OR 97520

TECHNOLOGY TYPE/PLATFORM:  
MAG G823/SLING

PREPARED BY:  
U.S. ARMY ABERDEEN TEST CENTER  
ABERDEEN PROVING GROUND, MD 21005-5059

AUGUST 2008



Prepared for:  
U.S. ARMY ENVIRONMENTAL COMMAND  
ABERDEEN PROVING GROUND, MD 21010-5401

U.S. ARMY DEVELOPMENTAL TEST COMMAND  
ABERDEEN PROVING GROUND, MD 21005-5055

DISTRIBUTION UNLIMITED, AUGUST 2008.

| Report Documentation Page  |                                    |                                     | Form Approved<br>OMB No. 0704-0188                          |   |                                 |
|--|------------------------------------|-------------------------------------|---|---|---------------------------------|
| Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. |                                    |                                     |   |   |                                 |
| 1. REPORT DATE<br><b>AUG 2008</b>  |                                    | 2. REPORT TYPE<br><b>Final</b>      |   | 3. DATES COVERED<br><b>3 Feb 2006 - 10 Feb 2006</b> |                                 |
| 4. TITLE AND SUBTITLE<br><b>Standardized UXO Technology Demonstration Site Woods Scoring Record No. 902 ( Sky Research, Inc.)</b>  |                                    |                                     | 5a. CONTRACT NUMBER   |   |                                 |
|  |                                    |                                     | 5b. GRANT NUMBER  |   |                                 |
|  |                                    |                                     | 5c. PROGRAM ELEMENT NUMBER                                  |   |                                 |
| 6. AUTHOR(S)<br><b>McClung, J. Stephen</b>   |                                    |                                     | 5d. PROJECT NUMBER<br><b>8-CO-160-UXO-021</b>               |   |                                 |
|  |                                    |                                     | 5e. TASK NUMBER   |   |                                 |
|  |                                    |                                     | 5f. WORK UNIT NUMBER  |   |                                 |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br><b>Commander U.S. Army Aberdeen Test Center ATTN: TEDT-AT-SLE<br/>Aberdeen Proving Ground, MD 21005-5059</b>   |                                    |                                     | 8. PERFORMING ORGANIZATION REPORT NUMBER<br><b>ATC-9797</b> |   |                                 |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br><b>Commander U.S. Army Environmental Command ATTN: IMAE-RTA<br/>Aberdeen Proving Ground, MD 21005-5401</b>  |                                    |                                     | 10. SPONSOR/MONITOR'S ACRONYM(S)                            |   |                                 |
|  |                                    |                                     | 11. SPONSOR/MONITOR'S REPORT NUMBER(S)                      |   |                                 |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT<br><b>Approved for public release, distribution unlimited</b>  |                                    |                                     |   |   |                                 |
| 13. SUPPLEMENTARY NOTES<br><b>The original document contains color images.</b>   |                                    |                                     |   |   |                                 |
| 14. ABSTRACT<br><b>This scoring record documents the efforts of Sky Research, Inc. to detect and discriminate inert unexploded ordnance (UXO) utilizing the APG Standardized UXO Technology Demonstration Site Woods. This Scoring Record was coordinated by J. Stephen McClung and the Standardized UXO Technology Demonstration Site Scoring Committee. Organizations on the committee include the U.S. Army Corps of Engineers, the Environmental Security Technology Certification Program, the Strategic Environmental Research and Development Program, the Institute for Defense Analysis, the U.S. Army Environmental Command, and the U.S. Army Aberdeen Test Center.</b>   |                                    |                                     |   |   |                                 |
| 15. SUBJECT TERMS  |                                    |                                     |   |   |                                 |
| 16. SECURITY CLASSIFICATION OF:  |                                    |                                     | 17. LIMITATION OF ABSTRACT<br><b>SAR</b>                    | 18. NUMBER OF PAGES<br><b>67</b>                    | 19a. NAME OF RESPONSIBLE PERSON |
| a. REPORT<br><b>unclassified</b>   | b. ABSTRACT<br><b>unclassified</b> | c. THIS PAGE<br><b>unclassified</b> |   |   |                                 |

### DISPOSITION INSTRUCTIONS

Destroy this document when no longer needed. Do not return to the originator.

The use of trade names in this document does not constitute an official endorsement or approval of the use of such commercial hardware or software. This document may not be cited for purposes of advertisement.

TEDT-AT-SLE







MEMORANDUM FOR RECORD

SUBJECT: Operations Security (OPSEC) Review of Paper/Presentation

1. The attached document entitled "Scoring Record No. 902" dated August 2008 is provided for review for public disclosure in accordance with AR 530-1 as supplemented. The document is proposed for public release via the internet.

2. I, the undersigned, am aware of the intelligence interest in open source publications and in the subject matter of the information I have reviewed for intelligence purposes. I certify that I have sufficient technical expertise in the subject matter of this document and that, to the best of my knowledge, the net benefit of this public release outweighs the potential damage to the essential secrecy of all related ATC, DTC, ATEC, Army or other DOD programs of which I am aware.
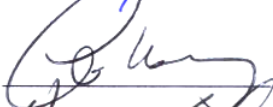
|                           |  |                    |
|---------------------------|--|--------------------|
| <u>J. Stephen McClung</u> | <u></u> | <u>August 2008</u> |
| NAME (Printed)            | SIGNATURE  | DATE               |

| CONCURRENCE:  | NAME (Printed)           | SIGNATURE   | DATE             |
|---|--------------------------|---|------------------|
| Program Mgr/Customer<br>(If not ATC owned technology)                 | <u>Patrick McDonnell</u> | <u></u>  | <u>9/30/08</u>   |
| Directorate Director  | <u>Charles Valz</u>      | <u></u> | <u>10/14/08</u>  |
| Directorate OPSEC QC and<br>Team Leader                               | <u>William Burch</u>     | <u></u> | <u>28 AUG 08</u> |
| ATC OPSEC Officer/<br>Security Manager                                | <u>Jenell Bigham</u>     | <u></u> | <u>2008 08</u>   |
| Public Affairs Specialist   | <u>Crystal Maynard</u>   | <u></u> | <u>22 Oct 08</u> |
| Technical Director, ATC<br>(Return to ATC PAO for further processing) | <u>John R. Wallace</u>   | <u></u> | <u>23 Oct 08</u> |
| DTC GO/SES  | <u>N/A</u>               | <u></u>   | <u></u>          |

Encl  
as

| <b>REPORT DOCUMENTATION PAGE</b>   |              |                                |                                   | <i>Form Approved</i><br>OMB No. 0704-0188                            |  |
|--|--------------|--------------------------------|-----------------------------------|--|--|
| The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. |              |                                |                                   |  |  |
| <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>  |              |                                |                                   |  |  |
| <b>1. REPORT DATE (DD-MM-YYYY)</b><br>August 2008  |              | <b>2. REPORT TYPE</b><br>Final |                                   | <b>3. DATES COVERED (From - To)</b><br>3, 6, 9, and 10 February 2006 |  |
| <b>4. TITLE AND SUBTITLE</b><br>STANDARDIZED UXO TECHNOLOGY DEMONSTRATION<br>WOODS SCORING RECORD NO.902 (SKY RESEARCH, INC.)  |              |                                |                                   | <b>5a. CONTRACT NUMBER</b><br>SITE                                   |  |
|  |              |                                |                                   | <b>5b. GRANT NUMBER</b>  |  |
|  |              |                                |                                   | <b>5c. PROGRAM ELEMENT NUMBER</b>                                    |  |
| <b>6. AUTHOR(S)</b><br>McClung, J. Stephen   |              |                                |                                   | <b>5d. PROJECT NUMBER</b><br>8-CO-160-UXO-021                        |  |
|  |              |                                |                                   | <b>5e. TASK NUMBER</b>   |  |
|  |              |                                |                                   | <b>5f. WORK UNIT NUMBER</b>  |  |
| <b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b><br>Commander<br>U.S. Army Aberdeen Test Center<br>ATTN: TEDT-AT-SLE<br>Aberdeen Proving Ground, MD 21005-5059  |              |                                |                                   | <b>8. PERFORMING ORGANIZATION REPORT NUMBER</b><br><br>ATC-9797      |  |
| <b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b><br>Commander<br>U.S. Army Environmental Command<br>ATTN: IMAE-RTA<br>Aberdeen Proving Ground, MD 21005-5401   |              |                                |                                   | <b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>                              |  |
|  |              |                                |                                   | <b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b><br>Same as Item 8      |  |
| <b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b><br>Distribution unlimited.  |              |                                |                                   |  |  |
| <b>13. SUPPLEMENTARY NOTES</b><br>None   |              |                                |                                   |  |  |
| <b>14. ABSTRACT</b><br><br>This scoring record documents the efforts of Sky Research, Inc. to detect and discriminate inert unexploded ordnance (UXO) utilizing the APG Standardized UXO Technology Demonstration Site Woods. This Scoring Record was coordinated by J. Stephen McClung and the Standardized UXO Technology Demonstration Site Scoring Committee. Organizations on the committee include the U.S. Army Corps of Engineers, the Environmental Security Technology Certification Program, the Strategic Environmental Research and Development Program, the Institute for Defense Analysis, the U.S. Army Environmental Command, and the U.S. Army Aberdeen Test Center.   |              |                                |                                   |  |  |
| <b>15. SUBJECT TERMS</b>   |              |                                |                                   |  |  |
| <b>16. SECURITY CLASSIFICATION OF:</b>   |              |                                | <b>17. LIMITATION OF ABSTRACT</b> | <b>18. NUMBER OF PAGES</b>   | <b>19a. NAME OF RESPONSIBLE PERSON</b>           |
| a. REPORT  | b. ABSTRACT  | c. THIS PAGE                   |                                   |  | <b>19b. TELEPHONE NUMBER (Include area code)</b> |
| Unclassified   | Unclassified | Unclassified                   | SAR                               |  |  |

## **ACKNOWLEDGMENTS**

### **Authors:**

Rick Fling  
Aberdeen Test Support Services (ATSS)  
Sverdrup Technology, Inc.  
U.S. Army Aberdeen Proving Ground (APG)

Christina McClung  
Aberdeen Data Services Team (ADST)  
Logistics Engineering and Information Technology Company (Log.Sec)  
U.S. Army Aberdeen Proving Ground

### **Contributors:**

William Burch  
J. Stephen McClung  
Military Environmental Technology Demonstration Center (METDC)  
U.S. Army Aberdeen Test Center (ATC)  
U.S. Army Aberdeen Proving Ground

Leonardo Lombardo  
Aberdeen Test Support Services  
Sverdrup Technology, Inc.  
U.S. Army Aberdeen Proving Ground

Patrick McDonnell  
Booz Allen Hamilton (BAH)  
U.S. Army Environmental Command (USAEC)  
U.S. Army Aberdeen Proving Ground

## **TABLE OF CONTENTS**

|  | <b><u>PAGE</u></b> |
|--|--------------------|
| ACKNOWLEDGMENTS .....  | i                  |
| <b><u>SECTION 1. GENERAL INFORMATION</u></b>                             |                    |
| 1.1 BACKGROUND .....   | 1                  |
| 1.2 SCORING OBJECTIVES .....   | 1                  |
| 1.2.1 Scoring Methodology .....  | 1                  |
| 1.2.2 Scoring Factors .....  | 3                  |
| 1.3 STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS .....                | 4                  |
| <b><u>SECTION 2. DEMONSTRATION</u></b>                                   |                    |
| 2.1 DEMONSTRATOR INFORMATION .....                                       | 5                  |
| 2.1.1 Demonstrator Point of Contact (POC) and Address .....              | 5                  |
| 2.1.2 System Description .....   | 5                  |
| 2.1.3 Data Processing Description .....                                  | 6                  |
| 2.1.4 Data Submission Format .....                                       | 6                  |
| 2.1.5 Demonstrator Quality Assurance (QA) and Quality Control (QC) ..... | 7                  |
| 2.1.6 Additional Records .....   | 8                  |
| 2.2 APG SITE INFORMATION .....   | 9                  |
| 2.2.1 Location .....   | 9                  |
| 2.2.2 Soil Type .....  | 9                  |
| 2.2.3 Test Areas .....   | 9                  |
| <b><u>SECTION 3. FIELD DATA</u></b>                                      |                    |
| 3.1 DATE OF FIELD ACTIVITIES .....                                       | 10                 |
| 3.2 AREAS TESTED/NUMBER OF HOURS .....                                   | 10                 |
| 3.3 TEST CONDITIONS .....  | 10                 |
| 3.3.1 Weather Conditions .....   | 10                 |
| 3.3.2 Field Conditions .....   | 10                 |
| 3.3.3 Soil Moisture .....  | 10                 |
| 3.4 FIELD ACTIVITIES .....   | 11                 |
| 3.4.1 Setup/Mobilization .....   | 11                 |
| 3.4.2 Calibration .....  | 11                 |
| 3.4.3 Downtime Occasions .....   | 11                 |
| 3.4.4 Data Collection .....  | 11                 |
| 3.4.5 Demobilization .....   | 11                 |
| 3.5 PROCESSING TIME .....  | 12                 |
| 3.6 DEMONSTRATOR'S FIELD PERSONNEL .....                                 | 12                 |
| 3.7 DEMONSTRATOR'S FIELD SURVEYING METHOD .....                          | 12                 |
| 3.8 SUMMARY OF DAILY LOGS .....  | 12                 |

## **SECTION 4. TECHNICAL PERFORMANCE RESULTS**

|  | <b><u>PAGE</u></b> |
|--|--------------------|
| 4.1 ROC CURVES USING ALL ORDNANCE CATEGORIES .....             | 13                 |
| 4.2 ROC CURVES USING ORDNANCE LARGER THAN 20 MM .....          | 14                 |
| 4.3 PERFORMANCE SUMMARIES .....                                | 16                 |
| 4.4 EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION ..... | 17                 |
| 4.5 LOCATION ACCURACY .....                                    | 18                 |

## **SECTION 5. ON-SITE LABOR COSTS**

## **SECTION 6. COMPARISON OF RESULTS TO OPEN FIELD DEMONSTRATION**

|  |    |
|--|----|
| 6.1 SUMMARY OF RESULTS FROM OPEN FIELD DEMONSTRATION .....             | 21 |
| 6.2 COMPARISON OF ROC CURVES USING ALL ORDNANCE<br>CATEGORIES .....    | 21 |
| 6.3 COMPARISON OF ROC CURVES USING ORDNANCE LARGER THAN<br>20 MM ..... | 23 |
| 6.4 STATISTICAL COMPARISONS .....                                      | 24 |

## **SECTION 7. APPENDIXES**

|                               |     |
|-------------------------------|-----|
| A TERMS AND DEFINITIONS ..... | A-1 |
| B DAILY WEATHER LOGS .....    | B-1 |
| C SOIL MOISTURE .....         | C-1 |
| D DAILY ACTIVITY LOGS .....   | D-1 |
| E REFERENCES .....            | E-1 |
| F ABBREVIATIONS .....         | F-1 |
| G DISTRIBUTION LIST .....     | G-1 |



## **SECTION 1. GENERAL INFORMATION**

### **1.1 BACKGROUND**

Technologies under development for the detection and discrimination of munitions and explosives of concern (MEC) - i.e. unexploded ordnance (UXO) and discarded military munitions (DMM) require testing so that their performance can be characterized. To that end, Standardized Test Sites have been developed at Aberdeen Proving Ground (APG), Maryland, and U.S. Army Yuma Proving Ground (YPG), Arizona. These test sites provide a diversity of geology, climate, terrain, and weather as well as diversity in ordnance and clutter. Testing at these sites is independently administered and analyzed by the government for the purposes of characterizing technologies, tracking performance with system development, comparing performance of different systems, and comparing performance in different environments.

The Standardized UXO Technology Demonstration Site Program is a multiagency program spearheaded by the U.S. Army Environmental Command (USAEC). The U.S. Army Aberdeen Test Center (ATC) and the U.S. Army Corps of Engineers Engineer Research and Development Center (ERDC) provide programmatic support. The program is being funded and supported by the Environmental Security Technology Certification Program (ESTCP), the Strategic Environmental Research and Development Program (SERDP), and the Army Environmental Quality Technology Program (EQT).

### **1.2 SCORING OBJECTIVES**

The objective in the Standardized UXO Technology Demonstration Site Program is to evaluate the detection and discrimination capabilities of a given technology under various field and soil conditions. Inert munitions and clutter items are positioned in various orientations and depths in the ground.

The evaluation objectives are as follows:

- a. To determine detection and discrimination effectiveness under realistic scenarios that vary targets, geology, clutter, topography, and vegetation.
- b. To determine cost, time, and manpower requirements to operate the technology.
- c. To determine demonstrator's ability to analyze survey data in a timely manner and provide prioritized "Target Lists" with associated confidence levels.
- d. To provide independent site management to enable the collection of high quality, ground-truth, geo-referenced data for post-demonstration analysis.

#### **1.2.1 Scoring Methodology**

- a. The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection ( $P_d$ ) and the false alarms are reported as receiver-operating

characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive ( $P_{fp}$ ), and those that do not correspond to any known item, termed background alarms.

b. The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the blind grid RESPONSE STAGE, the demonstrator provides the scoring committee with a target response from each and every grid square along with a noise level below which target responses are deemed insufficient to warrant further investigation. This list is generated with minimal processing and, since a value is provided for every grid square, will include signals both above and below the system noise level.

c. The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such and to reject clutter. For the blind grid DISCRIMINATION STAGE, the demonstrator provides the scoring committee with the output of the algorithms applied in the discrimination-stage processing for each grid square. The values in this list are prioritized based on the demonstrator's determination that a grid square is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For digital signal processing, priority ranking is based on algorithm output. For other discrimination approaches, priority ranking is based on human (subjective) judgment. The demonstrator also specifies the threshold in the prioritized ranking that provides optimum performance, (i.e. that is expected to retain all detected ordnance and rejects the maximum amount of clutter).

d. The demonstrator is also scored on EFFICIENCY and REJECTION RATIO, which measures the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from non-ordnance items. EFFICIENCY measures the fraction of detected ordnance retained after discrimination, while the REJECTION RATIO measures the fraction of false alarms rejected. Both measures are defined relative to performance at the demonstrator-supplied level below which all responses are considered noise, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.

e. Based on configuration of the ground truth at the standardized sites and the defined scoring methodology, there exists the possibility of having anomalies within overlapping halos and/or multiple anomalies within halos. In these cases, the following scoring logic is implemented:

(1) In situations where multiple anomalies exist within a single  $R_{halo}$ , the anomaly with the strongest response or highest ranking will be assigned to that particular ground truth item.

(2) For overlapping  $R_{halo}$  situations, ordnance has precedence over clutter. The anomaly with the strongest response or highest ranking that is closest to the center of a particular ground truth item gets assigned to that item. Remaining anomalies are retained until all matching is complete.

(3) Anomalies located within any  $R_{\text{halo}}$  that do not get associated with a particular ground truth item are thrown out and are not considered in the analysis.

f. All scoring factors are generated utilizing the Standardized UXO Probability and Plot Program, version 3.1.1.

### **1.2.2 Scoring Factors**

Factors to be measured and evaluated as part of this demonstration include:

a. Response Stage ROC curves:

- (1) Probability of Detection ( $P_d^{\text{res}}$ ).
- (2) Probability of False Positive ( $P_{\text{fp}}^{\text{res}}$ ).
- (3) Background Alarm Rate ( $\text{BAR}^{\text{res}}$ ) or Probability of Background Alarm ( $P_{\text{BA}}^{\text{res}}$ ).

b. Discrimination Stage ROC curves:

- (1) Probability of Detection ( $P_d^{\text{disc}}$ ).
- (2) Probability of False Positive ( $P_{\text{fp}}^{\text{disc}}$ ).
- (3) Background Alarm Rate ( $\text{BAR}^{\text{disc}}$ ) or Probability of Background Alarm ( $P_{\text{BA}}^{\text{disc}}$ ).

c. Metrics:

- (1) Efficiency (E).
- (2) False Positive Rejection Rate ( $R_{\text{fp}}$ ).
- (3) Background Alarm Rejection Rate ( $R_{\text{BA}}$ ).

d. Other:

- (1) Probability of Detection by Size and Depth.
- (2) Classification by type (i.e., 20-, 40-, 105-mm, etc.).
- (3) Location accuracy.
- (4) Equipment setup, calibration time and corresponding man-hour requirements.
- (5) Survey time and corresponding man-hour requirements.

- (6) Reacquisition/resurvey time and man-hour requirements (if any).
- (7) Downtime due to system malfunctions and maintenance requirements.

### 1.3 STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS

The standard and nonstandard ordnance items emplaced in the test areas are listed in Table 1. Standardized targets are members of a set of specific ordnance items that have identical properties to all other items in the set (caliber, configuration, size, weight, aspect ratio, material, filler, magnetic remanence, and nomenclature). Nonstandard targets are inert ordnance items having properties that differ from those in the set of standardized targets.

**TABLE 1. INERT ORDNANCE TARGETS**

| <b>Standard Type</b>         | <b>Nonstandard (NS)</b> |
|------------------------------|-------------------------|
| 20-mm Projectile M55         | 20-mm Projectile M55    |
|                              | 20-mm Projectile M97    |
| 40-mm Grenades M385          | 40-mm Grenades M385     |
| 40-mm Projectile MKII Bodies | 40-mm Projectile M813   |
| BDU-28 Submunition           |                         |
| BLU-26 Submunition           |                         |
| M42 Submunition              |                         |
| 57-mm Projectile APC M86     |                         |
| 60-mm Mortar M49A3           | 60-mm Mortar (JPG)      |
|                              | 60-mm Mortar M49        |
| 2.75-inch Rocket M230        | 2.75-inch Rocket M230   |
|                              | 2.75-inch Rocket XM229  |
| MK 118 ROCKEYE               |                         |
| 81-mm Mortar M374            | 81-mm Mortar (JPG)      |
|                              | 81-mm Mortar M374       |
| 105-mm Heat Rounds M456      |                         |
| 105-mm Projectile M60        | 105-mm Projectile M60   |
| 155-mm Projectile M483A1     | 155-mm Projectile M483A |
|                              | 500-lb Bomb             |

HEAT = high-explosive antitank.

JPG = Jefferson Proving Ground.

## **SECTION 2. DEMONSTRATION**

### **2.1 DEMONSTRATOR INFORMATION**

#### **2.1.1 Demonstrator Point of Contact (POC) and Address**

POC: Ms. Stacey Kingsbury  
(540) 961-9132

Address: Sky Research, Inc.  
445 Dead Indian Memorial Road  
Ashland, OR 97520

#### **2.1.2 System Description (provided by demonstrator)**

Sky Research is conducting three surveys each at APG and YPG to demonstrate the capabilities of electromagnetic induction (EMI) and magnetometer technologies and our data analysis capabilities. These three surveys include:

a. Survey 1. The active response site and the test sites (calibration lane, blind test grid, and open field scenarios) with Sky Research's EM61-MKII towed array (fig. 1). This survey utilizes an array of five Geonics EM61 MKII sensors deployed with a 0.5-meter spacing between each coil. Data are logged using the SKY-DAS at a 10 Hz rate and positioned with the Leica TPS1200 Robotic Total Station (RTS) technology. In addition, the DAS collects sensor and platform orientation data from the Crossbow AHRS-400 inertial measurement unit (IMU).

b. Survey 2. Active site and test site (calibration lanes, blind test grids, open field, wooded area, moguls, and desert extreme scenarios) with Sky Research's man-portable, quad-sensor magnetometer array; digital compass for orientation; and Leica RTS for positioning. Geometrics G-823 total field cesium vapor magnetometers are being used for this survey. Sky Research deploys this equipment on a low-noise, man-portable, quad-sensor array with an integrated digital compass for sensor orientation information. The G-823 system is configured to stream data at 10 samples per channel per second (10 Hz). At a nominal traverse rate of 0.8 meter per second (around 3 km/hour), this equates to approximately one sample per 8 cm of forward advance.

c. Survey 3. Calibration lane, blind test grids, and moguls only with Sky Research's gimbaled EM61 MKII developed via SERDP 1310. The cart is configured to mitigate motion and orientation changes and positioned with the Leica RTS. This survey deploys the same sensors as survey 1: a Geonics EM61-MKII, Crossbow IMU integrated with the Leica RTS.



Figure 1. Demonstrator's system, MAG G823/sling.

### **2.1.3 Data Processing Description (provided by demonstrator)**

a. In addition to standard data processing, we are demonstrating the capability to merge orientation information with sensor data, advanced electromagnetic (EM) and MAG processing capability, and the advanced capability to analyze magnetic and EM data together using the UXOLab software package. This advanced analysis includes the merging of target lists collected by each sensor system and the use of the magnetic data to constrain the EM interpretation via cooperative inversion. Sky Research's standard data processing includes data leveling, statistical data assessment, grid generation, and customized data filtering to accentuate target signatures. Sky Research uses software from the sensor manufacturers and the UXOLab software developed by the proposed project Principal Investigator, Dr. Stephen Billings, to complete all data processing tasks.

b. The discrimination methodology we deploy is a variation of the finger-printing method. That is, the response of each anomaly is compared with the response of each item in a library of ordnance items expected to be present in the area. All inversions are performed using the full 3-D position and orientation information of each sensor.

### **2.1.4 Data Submission Format**

Data are submitted for scoring in accordance with data submission protocols outlined in the Standardized UXO Technology Demonstration Site Handbook. These submitted data are not included in this report in order to protect ground truth information.

### **2.1.5 Demonstrator Quality Assurance (QA) and Quality Control (QC) (provided by demonstrator)**

QC. The following procedures and logs are used to maximize standardization, repeatability, and control of mapping activities:

a. Equipment Standardization Form: This log documents the daily calibration of each field sensor and navigation system. This form documents the results and analysis of the pre- and post-survey Static Test, Static Spike Test, Cable Shake Test, Backsight, and QC Check Positions.

b. Position Standardization Form: This log documents daily calibration of the real-time kinematic (RTK) Navigation system. Pre-and post-survey results of the 3-Point Navigation Function Test, summary data sampling parameters, and detection of blind seed items are documented.

c. Survey Event Summary Form: This log is used to identify the location of each geophysical survey crew on a daily basis. The log tracks crew members, equipment, filenames, and expected areas to be surveyed. Attached to this daily log are maps of the areas to be surveyed containing the coordinates of benchmarks in the areas as well as the coordinates of each quadrant corner.

d. Data Processing Log: All data from the field are run through a standard data-processing procedure. This procedure is the same for all data and is tracked with the Data Processing Log. This log documents all coordinate transformations, visual data-quality checks, statistical data-quality checks, survey-coverage statistics, interpolation parameters, etc.

e. Target Reanalysis: All targets analyzed as part of the project are subject to review by the project geophysicist. In addition, a minimum of 10 percent of all targets are reanalyzed by a separate geophysicist to ensure data quality.

QA. QA measures are integrated with the QC activities. In addition, standardization procedures implemented on a site-specific basis are used to maximize efficiency and to adjust to logistical and schedule requirements. The procedure below is used at the site to define the spatial accuracy of the data as well as the repeatability of the sensor readings:

a. A 50-foot-long straight-line transect is established with the positions of the endpoints and midpoint logged via RTS.

b. Wherever possible the traverse line is oriented North to South. Each survey system (sensor and navigation unit) used to collect data is operated over the transect each day following standard procedures as follows:

1) An operator logs background data along the traverse, first heading north from the southern endpoint, and then returning south from the northern endpoint.

- 2) A metallic pin-flag is placed over the midpoint.
  - 3) The operator logs data along the same path, first traveling north, and then returning south.
  - 4) The operator logs data along the same path, first traveling north at a slow pace, and then returning south at a significantly more rapid pace.
- c. All data lines are downloaded and provided to the site geophysicist for review. These data are examined to determine the repeatability of the pin-flag anomaly amplitude and the repeatability of the positional location of the amplitude peak.

In addition, for the EM, a static background and spike test is performed twice daily, prior to collecting data and after completion of data collection. This test monitors the instrument background readings, monitors for electronic drift, identifies potential interference, and determines the impulse response and repeatability of measurements over a standard test item. The standard test item is a standard 2-inch-diameter steel trailer hitch ball. For the towed array system, the tow vehicle is turned on during the test. With the instrument held in static position, measurements are recorded for at least 3 minutes. A standard test item is then placed under the center of each coil and an additional minute of data is recorded. Static background readings for the EM-61 MKII should remain within 2.5 mV of background. Readings for the response of the standard test item should be within 20 percent after subtraction of the sensor baseline response.

For the magnetometer array, a heading calibration and test is performed twice daily, prior to collecting data and after completion of data collection. This test involves traverses across a known point located away from buried UXO or other metallic debris. A 5-meter-length of line is walked in eight cardinal directions (N-S, S-N, E-W, W-E, SE-NW, NW-SE, SW-NE, NE-SW). The intersections of each line-direction and each sensor are then compared. If any sensor/line direction combination is found to differ by more than 10 nT, the survey is halted until the reason for this heading-induced error is identified and eliminated.

#### **2.1.6 Additional Records**

The following record(s) by this vendor can be accessed via the Internet as Microsoft Word documents at [www.uxotestsites.org](http://www.uxotestsites.org). The counterparts to this report are the blind grid, Scoring Record No. 900, and the open field, Scoring Record No. 901.



## 2.2 APG SITE INFORMATION

### 2.2.1 Location

The APG Standardized Test Site is located within a secured range area of the Aberdeen Area. The Aberdeen Area of APG is located approximately 30 miles northeast of Baltimore at the northern end of the Chesapeake Bay. The Standardized Test Site encompasses 17 acres of upland and lowland flats, woods and wetlands.

### 2.2.2 Soil Type

According to the soils survey conducted for the entire area of APG in 1998, the test site consists primarily of Elkton Series type soil (ref 2). The Elkton Series consist of very deep, slowly permeable, poorly drained soils. These soils formed in silty aeolin sediments and the underlying loamy alluvial and marine sediments. They are on upland and lowland flats and in depressions of the Mid-Atlantic Coastal Plain. Slopes range from 0 to 2 percent.

ERDC conducted a site-specific analysis in May of 2002 (ref 3). The results basically matched the soil survey mentioned above. Seventy percent of the samples taken were classified as silty loam. The majority (77 percent) of the soil samples had a measured water content between 15- and 30-percent with the water content decreasing slightly with depth.

For more details concerning the soil properties at the APG test site, go to [www.uxotestsites.org](http://www.uxotestsites.org) on the Web to view the entire soils description report.

### 2.2.3 Test Areas

A description of the test site areas at APG is included in Table 2.

**TABLE 2. TEST SITE AREAS**

| Area             | Description  |
|------------------|--|
| Calibration Grid | Contains 14 standard ordnance items buried in six positions at various angles and depths to allow demonstrators to calibrate their equipment.  |
| Blind Test Grid  | Contains 400 grid cells in a 0.2-hectare (0.5 acre) site. The center of each grid cell contains ordnance, clutter or nothing.  |
| Open Field       | A 4-hectare (10-acre) site containing open areas, dips, ruts and obstructions that challenge platform systems or hand held detectors. The challenges include a gravel road, wet areas and trees. The vegetation height varies from 15 to 25 cm.                        |
| Woods            | 1.35-acre area consisting of cleared woods (tree removal with only stumps remaining), partially cleared woods (including all underbrush and fallen trees), and virgin woods (i.e., woods in natural state with all trees, underbrush, and fallen trees left in place). |

### **SECTION 3. FIELD DATA**

#### **3.1 DATE OF FIELD ACTIVITIES (3, 6, 9, and 10 February 2006)**

#### **3.2 AREAS TESTED/NUMBER OF HOURS**

Areas tested and total number of hours operated at each site are summarized in Table 3.

**TABLE 3. AREAS TESTED AND  
NUMBER OF HOURS**

| <b>Area</b>       | <b>Number of Hours</b> |
|-------------------|------------------------|
| Calibration lanes | 2.58                   |
| Woods             | 11.83                  |

#### **3.3 TEST CONDITIONS**

##### **3.3.1 Weather Conditions**

A APG weather station located approximately one mile west of the test site was used to record average temperature and precipitation on a half-hour basis for each day of operation. The temperatures listed in Table 4 represent the average temperature during field operations from 0700 to 1700 hours while precipitation data represents a daily total amount of rainfall. Hourly weather logs used to generate this summary are provided in Appendix B.

**TABLE 4. TEMPERATURE/PRECIPIATION DATA SUMMARY**

| <b>Date, 2006</b> | <b>Average Temperature, °F</b> | <b>Total Daily Precipitation, in.</b> |
|-------------------|--------------------------------|---------------------------------------|
| 3 February        | 58.9                           | 0.33                                  |
| 6 February        | 38.9                           | 0.00                                  |
| 9 February        | 32.8                           | 0.00                                  |
| 10 February       | 35.2                           | 0.00                                  |
| 17 February       | 53.2                           | 0.01                                  |

##### **3.3.2 Field Conditions**

Sky Research surveyed the wooded area 9 and 10 February 2006. The weather was cold, the field was wet, and snow was on the ground.

##### **3.3.3 Soil Moisture**

Three soil probes were placed at various locations within the site to capture soil moisture data: blind grid, calibration, mogul, and open field areas. Measurements were collected in percent moisture and were taken twice daily (morning and afternoon) from five different soil depths (1 to 6 in., 6 to 12 in., 12 to 24 in., 24 to 36 in., and 36 to 48 in.) from each probe. Soil moisture logs are included in Appendix C.

### **3.4 FIELD ACTIVITIES**

#### **3.4.1 Setup/Mobilization**

These activities included initial mobilization and daily equipment preparation and break down. A three-person crew took 2 hours and 30 minutes to perform the initial setup and mobilization. There was 3 hours of daily equipment preparation and end of the day equipment break down lasted 50 minutes.

#### **3.4.2 Calibration**

Sky Research spent a total of 2 hours and 35 minutes in the calibration lanes, of which 45 minutes was spent collecting data. Three other calibration exercises totaling 1 hour and 30 minutes took place while surveying the wooded area.

#### **3.4.3 Downtime Occasions**

Occasions of downtime are grouped into five categories: equipment/data checks or equipment maintenance, equipment failure and repair, weather, demonstration site issues, or breaks/lunch. All downtime is included for the purposes of calculating labor costs (section 5) except for downtime due to demonstration site issues. Demonstration site issues, while noted in the daily log, are considered nonchargeable downtime for the purposes of calculating labor costs and are not discussed. Breaks and lunches are discussed in this section and billed to the total site survey area.

##### **3.4.3.1 Equipment/data checks, maintenance.**

Equipment data checks and maintenance activities accounted for 40 minutes of site usage time. These activities included changing out batteries and routine data checks to ensure the data was being properly recorded/collected. Sky Research spent an additional 50 minutes for breaks and lunches.

**3.4.3.2 Equipment failure or repair.** No time was needed to resolve equipment failures that occurred while surveying the woods.

**3.4.3.3 Weather.** No weather delays occurred during the survey.

**3.4.4 Data Collection.** Sky Research spent a total time of 11 hours and 50 minutes in the wooded area, 6 hours and 30 minutes of which was spent collecting data.

#### **3.4.5 Demobilization**

The Sky Research survey crew went on to conduct a full demonstration of the site. Therefore, demobilization did not occur until 17 February 2006. On that day, it took the crew 1 hour and 45 minutes to break down and pack up their equipment.

### **3.5 PROCESSING TIME**

Sky Research submitted the raw data from the demonstration activities on the last day of the demonstration, as required. The scoring submittal data was provided well outside the required 30-day timeframe.

### **3.6 DEMONSTRATOR'S FIELD PERSONNEL**

Geophysicist: Craig Hyslop  
Geophysicist: John Jacobsen  
Geophysicist: Rob Mehl

### **3.7 DEMONSTRATOR'S FIELD SURVEYING METHOD**

Sky Research surveyed the woods in a linear fashion. The line spacing was the width of the array.

### **3.8 SUMMARY OF DAILY LOGS**

Daily logs capture all field activities during this demonstration and are located in Appendix D. Activities pertinent to this specific demonstration are indicated in highlighted text.

## **SECTION 4. TECHNICAL PERFORMANCE RESULTS**

### **4.1 ROC CURVES USING ALL ORDNANCE CATEGORIES**

The probability of detection for the response stage ( $P_d^{\text{res}}$ ) and the discrimination stage ( $P_d^{\text{disc}}$ ) versus their respective probability of false positive are shown in Figure 2. Both probabilities plotted against their respective background alarm rate are shown in Figure 3. Both figures use horizontal lines to illustrate the performance of the demonstrator at two demonstrator-specified points: at the system noise level for the response stage, representing the point below which targets are not considered detectable, and at the demonstrator's recommended threshold level for the discrimination stage, defining the subset of targets the demonstrator would recommend digging based on discrimination. Note that all points have been rounded to protect the ground truth.

The overall ground truth is composed of ferrous and nonferrous anomalies. Due to limitations of the magnetometer, the nonferrous items cannot be detected. Therefore, the ROC curves presented in this section are based on the subset of the ground truth that is solely made up of ferrous anomalies.

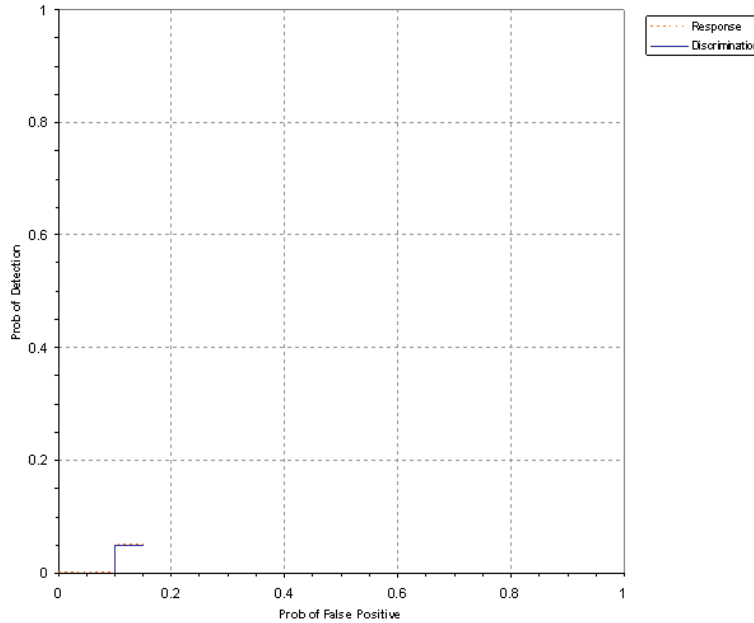


Figure 2. MAG G823/sling wooded area probability of detection for response and discrimination stages versus their respective probability of false positive over all ordnance categories combined.

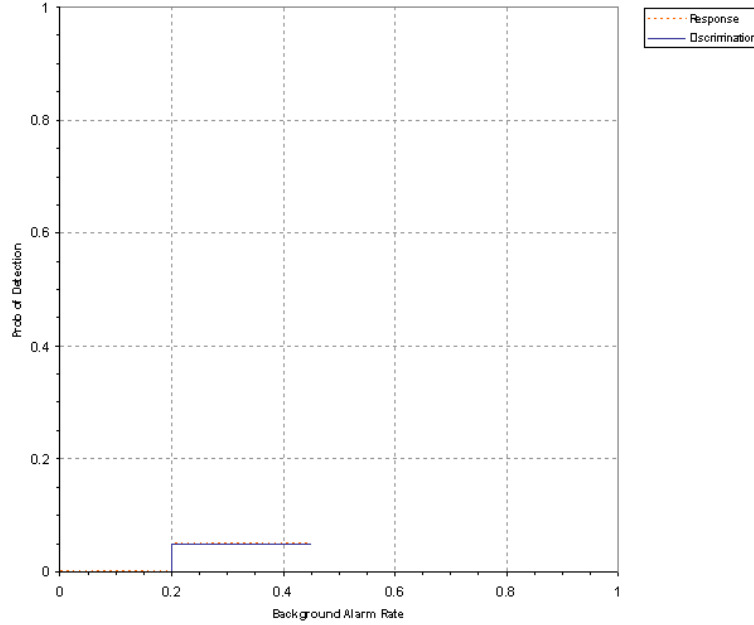


Figure 3. MAG G823/sling wooded area probability of detection for response and discrimination stages versus their respective background alarm rate over all ordnance categories combined.

## 4.2 ROC CURVES USING ORDNANCE LARGER THAN 20 MM

The probability of detection for the response stage ( $P_d^{\text{res}}$ ) and the discrimination stage ( $P_d^{\text{disc}}$ ) versus their respective probability of false positive when only targets larger than 20 mm are scored are shown in Figure 4. Both probabilities plotted against their respective background alarm rate are shown in Figure 5. Both figures use horizontal lines to illustrate the performance of the demonstrator at two demonstrator-specified points: at the system noise level for the response stage, representing the point below which targets are not considered detectable, and at the demonstrator's recommended threshold level for the discrimination stage, defining the subset of targets the demonstrator would recommend digging based on discrimination. Note that all points have been rounded to protect the ground truth.

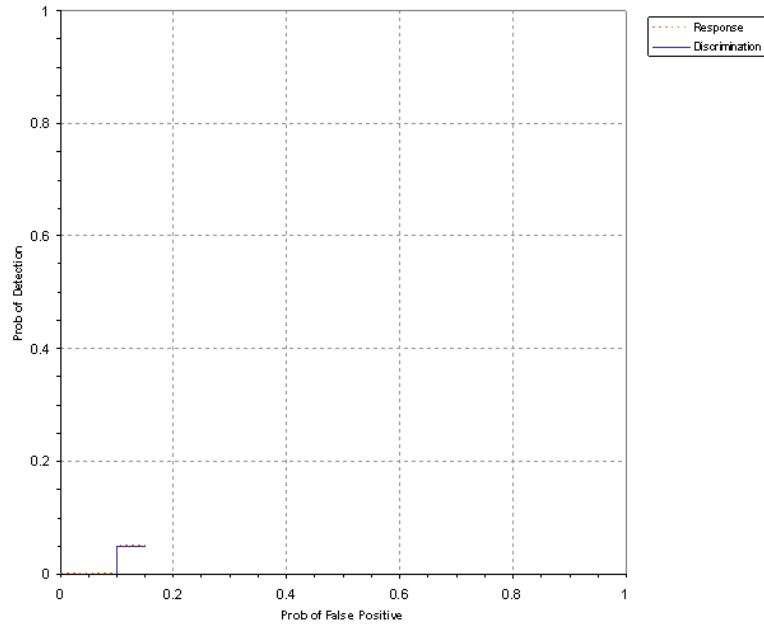


Figure 4. MAG G823/sling wooded area probability of detection for response and discrimination stages versus their respective probability of false positive for all ordnance larger than 20 mm.

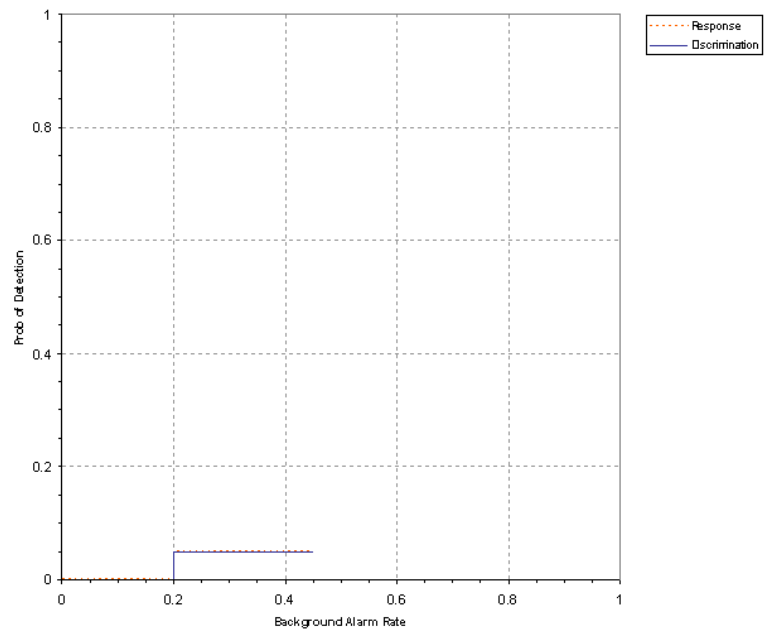


Figure 5. MAG G823/sling wooded area probability of detection for response and discrimination stages versus their respective background alarm rate for all ordnance larger than 20 mm.

### 4.3 PERFORMANCE SUMMARIES

Results for the wooded area test, broken out by size, depth and nonstandard ordnance, are presented in Tables 5a and 5b (for cost results, see section 5). Results by size and depth include both standard and nonstandard ordnance. The results by size show how well the demonstrator did at detecting/discriminating ordnance of a certain caliber range (see app A for size definitions). The results are relative to the number of ordnances emplaced. Depth is measured from the geometric center of anomalies.

The RESPONSE STAGE results are derived from the list of anomalies above the demonstrator-provided noise level. The results for the DISCRIMINATION STAGE are derived from the demonstrator's recommended threshold for optimizing UXO field cleanup by minimizing false digs and maximizing ordnance recovery. The lower 90 percent confidence limit on probability of detection and probability of false positive was calculated assuming that the number of detections and false positives are binomially distributed random variables. All results in Tables 5a and 5b have been rounded to protect the ground truth. However, lower confidence limits were calculated using actual results.

The overall ground truth is composed of ferrous and nonferrous anomalies. Due to limitations of the magnetometer, the nonferrous items cannot be detected. Therefore, the summary presented in Table 5a exhibits results based on the subset of the ground truth that is solely the ferrous anomalies. Table 5b exhibits results based on the full ground truth. All other tables presented in this section are based on scoring against the ferrous only ground truth. The response stage noise level and recommended discrimination stage threshold values are provided by the demonstrator.

**TABLE 5a. SUMMARY OF WOODED RESULTS (FERROUS ONLY)**

| Metric                         | Overall | Standard | Nonstandard | By Size |        |       | By Depth, m |           |      |
|--------------------------------|---------|----------|-------------|---------|--------|-------|-------------|-----------|------|
|                                |         |          |             | Small   | Medium | Large | < 0.3       | 0.3 to <1 | >= 1 |
| RESPONSE STAGE                 |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.05    | 0.05     | 0.05        | 0.00    | 0.10   | 0.15  | 0.10        | 0.05      | 0.00 |
| P <sub>d</sub> Low 90% Conf    | 0.04    | 0.03     | 0.02        | 0.00    | 0.05   | 0.06  | 0.05        | 0.01      | 0.00 |
| P <sub>d</sub> Upper 90% Conf  | 0.10    | 0.11     | 0.14        | 0.04    | 0.17   | 0.30  | 0.16        | 0.10      | 0.14 |
| P <sub>fp</sub>                | 0.15    | -        | -           | -       | -      | -     | 0.15        | 0.15      | 0.10 |
| P <sub>fp</sub> Low 90% Conf   | 0.12    | -        | -           | -       | -      | -     | 0.13        | 0.10      | 0.03 |
| P <sub>fp</sub> Upper 90% Conf | 0.16    | -        | -           | -       | -      | -     | 0.20        | 0.16      | 0.19 |
| BAR                            | 0.45    | -        | -           | -       | -      | -     | -           | -         | -    |
| DISCRIMINATION STAGE           |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.05    | 0.05     | 0.05        | 0.00    | 0.10   | 0.15  | 0.10        | 0.05      | 0.00 |
| P <sub>d</sub> Low 90% Conf    | 0.04    | 0.03     | 0.02        | 0.00    | 0.05   | 0.06  | 0.05        | 0.01      | 0.00 |
| P <sub>d</sub> Upper 90% Conf  | 0.10    | 0.11     | 0.14        | 0.04    | 0.17   | 0.30  | 0.16        | 0.10      | 0.14 |
| P <sub>fp</sub>                | 0.15    | -        | -           | -       | -      | -     | 0.15        | 0.10      | 0.10 |
| P <sub>fp</sub> Low 90% Conf   | 0.12    | -        | -           | -       | -      | -     | 0.12        | 0.10      | 0.03 |
| P <sub>fp</sub> Upper 90% Conf | 0.16    | -        | -           | -       | -      | -     | 0.20        | 0.16      | 0.19 |
| BAR                            | 0.40    | -        | -           | -       | -      | -     | -           | -         | -    |

Response Stage Noise Level: 1.50.

Recommended Discrimination Stage Threshold: 28.50.



**TABLE 5b. SUMMARY OF WOODED RESULTS (FULL GROUND TRUTH)**

| Metric                         | Overall | Standard | Nonstandard | By Size |        |       | By Depth, m |           |      |
|--------------------------------|---------|----------|-------------|---------|--------|-------|-------------|-----------|------|
|                                |         |          |             | Small   | Medium | Large | < 0.3       | 0.3 to <1 | >= 1 |
| RESPONSE STAGE                 |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.05    | 0.05     | 0.05        | 0.00    | 0.10   | 0.15  | 0.05        | 0.05      | 0.00 |
| P <sub>d</sub> Low 90% Conf    | 0.03    | 0.02     | 0.02        | 0.00    | 0.05   | 0.06  | 0.04        | 0.01      | 0.00 |
| P <sub>d</sub> Upper 90% Conf  | 0.08    | 0.09     | 0.11        | 0.03    | 0.17   | 0.30  | 0.12        | 0.09      | 0.13 |
| P <sub>fp</sub>                | 0.15    | -        | -           | -       | -      | -     | 0.15        | 0.15      | 0.10 |
| P <sub>fp</sub> Low 90% Conf   | 0.12    | -        | -           | -       | -      | -     | 0.13        | 0.10      | 0.03 |
| P <sub>fp</sub> Upper 90% Conf | 0.16    | -        | -           | -       | -      | -     | 0.20        | 0.16      | 0.19 |
| BAR                            | 0.45    | -        | -           | -       | -      | -     | -           | -         | -    |
| DISCRIMINATION STAGE           |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.05    | 0.05     | 0.05        | 0.00    | 0.10   | 0.15  | 0.05        | 0.05      | 0.00 |
| P <sub>d</sub> Low 90% Conf    | 0.03    | 0.02     | 0.02        | 0.00    | 0.05   | 0.06  | 0.04        | 0.01      | 0.00 |
| P <sub>d</sub> Upper 90% Conf  | 0.08    | 0.09     | 0.11        | 0.03    | 0.17   | 0.30  | 0.12        | 0.09      | 0.13 |
| P <sub>fp</sub>                | 0.15    | -        | -           | -       | -      | -     | 0.15        | 0.10      | 0.10 |
| P <sub>fp</sub> Low 90% Conf   | 0.12    | -        | -           | -       | -      | -     | 0.12        | 0.10      | 0.03 |
| P <sub>fp</sub> Upper 90% Conf | 0.16    | -        | -           | -       | -      | -     | 0.20        | 0.16      | 0.19 |
| BAR                            | 0.40    | -        | -           | -       | -      | -     | -           | -         | -    |

Response Stage Noise Level: 1.50.

Recommended Discrimination Stage Threshold: 28.50.

Note: The recommended discrimination stage threshold values are provided by the demonstrator.

#### 4.4 EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION

Efficiency and rejection rates are calculated to quantify the discrimination ability at specific points of interest on the ROC curve: (1) at the point where no decrease in P<sub>d</sub> is suffered (i.e., the efficiency is by definition equal to one) and (2) at the operator selected threshold. These values are reported in Table 6.

**TABLE 6. EFFICIENCY AND REJECTION RATES**

|                                | <b>Efficiency (E)</b> | <b>False Positive Rejection Rate</b> | <b>Background Alarm Rejection Rate</b> |
|--------------------------------|-----------------------|--------------------------------------|--|
| At Operating Point             | 1.00                  | 0.04                                 | 0.13                                   |
| With No Loss of P <sub>d</sub> | 1.00                  | 0.09                                 | 0.27                                   |

At the demonstrator's recommended setting, the ordnance items that were detected and correctly discriminated were further scored on whether their correct type could be identified (table 7). Correct type examples include 20-mm projectile, 105-mm HEAT Projectile, and 2.75-inch Rocket. A list of the standard type declaration required for each ordnance item was provided to demonstrators prior to testing. For example, the standard type for the three example items are 20mmP, 105H, and 2.75in, respectively.

**TABLE 7. CORRECT TYPE CLASSIFICATION  
OF TARGETS CORRECTLY  
DISCRIMINATED AS UXO**

| <b>Size</b> | <b>Percentage Correct</b> |
|-------------|---------------------------|
| Small       | 0.0                       |
| Medium      | 0.0                       |
| Large       | 0.0                       |
| Overall     | 0.0                       |

Note: The demonstrator did not attempt to provide type classification.

#### **4.5 LOCATION ACCURACY**

The mean location error and standard deviations appear in Table 8. These calculations are based on average missed depth for ordnance correctly identified in the discrimination stage. Depths are measured from the closest point of the ordnance to the surface. For the blind grid, only depth errors are calculated because (X, Y) positions are known to be the centers of each grid square.

**TABLE 8. MEAN LOCATION ERROR AND  
STANDARD DEVIATION (M)**

|          | <b>Mean</b> | <b>Standard Deviation</b> |
|----------|-------------|---------------------------|
| Northing | -0.131      | 0.251                     |
| Easting  | 0.175       | 0.139                     |
| Depth    | 0.000       | 0.000                     |

## **SECTION 5. ON-SITE LABOR COSTS**

A standardized estimate for labor costs associated with this effort was calculated as follows: the first person at the test site was designated supervisor, the second person was designated data analyst, and the third and following personnel were considered field support. Standardized hourly labor rates were charged by title: supervisor at \$95.00/hour, data analyst at \$57.00/hour, and field support at \$28.50/hour.

Government representatives monitored on-site activity. All on-site activities were grouped into one of ten categories: initial setup/mobilization, daily setup/stop, calibration, data collection, downtime due to break/lunch, downtime due to equipment failure, downtime due to equipment/data checks or maintenance, downtime due to weather, downtime due to demonstration site issue, or demobilization. See Appendix D for the daily activity log. See section 3.4 for a summary of field activities.

The standardized cost estimate associated with the labor needed to perform the field activities is presented in Table 9. Note that calibration time includes time spent in the calibration lanes as well as field calibrations. Site survey time includes daily setup/stop time, collecting data, breaks/lunch, downtime due to equipment/data checks or maintenance, downtime due to failure, and downtime due to weather.

**TABLE 9. ON-SITE LABOR COSTS**

|                      | <b>No. People</b> | <b>Hourly Wage</b> | <b>Hours</b> | <b>Cost</b>      |
|----------------------|-------------------|--------------------|--------------|------------------|
| <b>Initial Setup</b> |                   |                    |              |                  |
| Supervisor           | 1                 | \$95.00            | 2.5          | \$237.50         |
| Data analyst         | 1                 | 57.00              | 2.5          | 142.50           |
| Field support        | 1                 | 28.50              | 2.5          | 71.25            |
| Subtotal             |                   |                    |              | <b>\$451.25</b>  |
| <b>Calibration</b>   |                   |                    |              |                  |
| Supervisor           | 1                 | \$95.00            | 4.08         | \$387.60         |
| Data analyst         | 1                 | 57.00              | 4.08         | 232.56           |
| Field support        | 1                 | 28.50              | 4.08         | 116.28           |
| Subtotal             |                   |                    |              | <b>\$736.44</b>  |
| <b>Site Survey</b>   |                   |                    |              |                  |
| Supervisor           | 1                 | \$95.00            | 11.83        | \$1123.85        |
| Data analyst         | 1                 | 57.00              | 11.83        | 674.31           |
| Field support        | 1                 | 28.50              | 11.83        | 337.16           |
| Subtotal             |                   |                    |              | <b>\$2135.32</b> |

See notes at end of table.

**TABLE 9 (CONT'D)**

|                       | <b>No. People</b> | <b>Hourly Wage</b> | <b>Hours</b> | <b>Cost</b>      |
|-----------------------|-------------------|--------------------|--------------|------------------|
| <b>Demobilization</b> |                   |                    |              |                  |
| Supervisor            | 1                 | \$95.00            | 1.75         | \$166.25         |
| Data analyst          | 1                 | 57.00              | 1.75         | 99.75            |
| Field support         | 1                 | 28.50              | 1.75         | 49.88            |
| Subtotal              |                   |                    |              | \$315.88         |
| Total                 |                   |                    |              | <b>\$3638.89</b> |

Notes: Calibration time includes time spent in the calibration lanes as well as calibration before each data run.

Site Survey time includes daily setup/stop time, collecting data, breaks/lunch, downtime due to system maintenance, failure, and weather.

## **SECTION 6. COMPARISON OF RESULTS TO OPEN FIELD DEMONSTRATION** **(BASED ON FERROUS ONLY GROUND TRUTH)**

### **6.1 SUMMARY OF RESULTS FROM OPEN FIELD DEMONSTRATION**

Table 10 shows the results from the open field survey conducted prior to surveying the wooded area during the same site visit in February of 2006. Due to the system utilizing magnetometer type sensors, all results presented in the following section have been based on performance scoring against the ferrous only ground truth anomalies. For more details on the open field survey results reference section 2.1.6.

**TABLE 10. SUMMARY OF OPEN FIELD RESULTS FOR THE  
MAG G823/SLING (FERROUS ONLY)**

| Metric                         | Overall | Standard | Nonstandard | By Size |        |       | By Depth, m |           |      |
|--------------------------------|---------|----------|-------------|---------|--------|-------|-------------|-----------|------|
|                                |         |          |             | Small   | Medium | Large | < 0.3       | 0.3 to <1 | >= 1 |
| RESPONSE STAGE                 |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.35    | 0.40     | 0.35        | 0.20    | 0.40   | 0.45  | 0.40        | 0.35      | 0.30 |
| P <sub>d</sub> Low 90% Conf    | 0.33    | 0.34     | 0.27        | 0.17    | 0.35   | 0.39  | 0.35        | 0.28      | 0.21 |
| P <sub>d</sub> Upper 90% Conf  | 0.40    | 0.42     | 0.39        | 0.28    | 0.46   | 0.55  | 0.45        | 0.41      | 0.38 |
| P <sub>fp</sub>                | 0.35    | -        | -           | -       | -      | -     | 0.30        | 0.40      | 0.55 |
| P <sub>fp</sub> Low 90% Conf   | 0.34    | -        | -           | -       | -      | -     | 0.28        | 0.38      | 0.38 |
| P <sub>fp</sub> Upper 90% Conf | 0.38    | -        | -           | -       | -      | -     | 0.33        | 0.44      | 0.74 |
| BAR                            | 0.10    | -        | -           | -       | -      | -     | -           | -         | -    |
| DISCRIMINATION STAGE           |         |          |             |         |        |       |             |           |      |
| P <sub>d</sub>                 | 0.20    | 0.15     | 0.20        | 0.05    | 0.20   | 0.35  | 0.20        | 0.20      | 0.05 |
| P <sub>d</sub> Low 90% Conf    | 0.15    | 0.14     | 0.16        | 0.02    | 0.15   | 0.27  | 0.17        | 0.15      | 0.03 |
| P <sub>d</sub> Upper 90% Conf  | 0.21    | 0.20     | 0.26        | 0.09    | 0.24   | 0.42  | 0.25        | 0.26      | 0.13 |
| P <sub>fp</sub>                | 0.30    | -        | -           | -       | -      | -     | 0.25        | 0.35      | 0.45 |
| P <sub>fp</sub> Low 90% Conf   | 0.28    | -        | -           | -       | -      | -     | 0.22        | 0.32      | 0.26 |
| P <sub>fp</sub> Upper 90% Conf | 0.32    | -        | -           | -       | -      | -     | 0.27        | 0.38      | 0.63 |
| BAR                            | 0.05    | -        | -           | -       | -      | -     | -           | -         | -    |

### **6.2 COMPARISON OF ROC CURVES USING ALL ORDNANCE CATEGORIES**

The P<sub>d</sub><sup>res</sup> versus the respective P<sub>fp</sub> over all ordnance categories is shown in Figure 6. The P<sub>d</sub><sup>disc</sup> versus their respective P<sub>fp</sub> over all ordnance categories are shown in Figure 7.

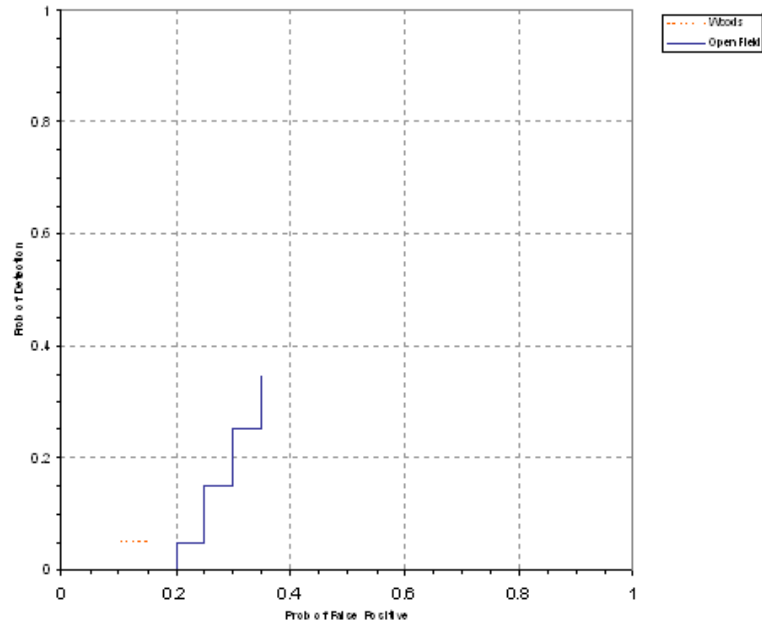


Figure 6. MAG G843/sling  $P_d^{\text{res}}$  stages versus the respective  $P_{\text{fp}}$  over all ordnance categories combined.

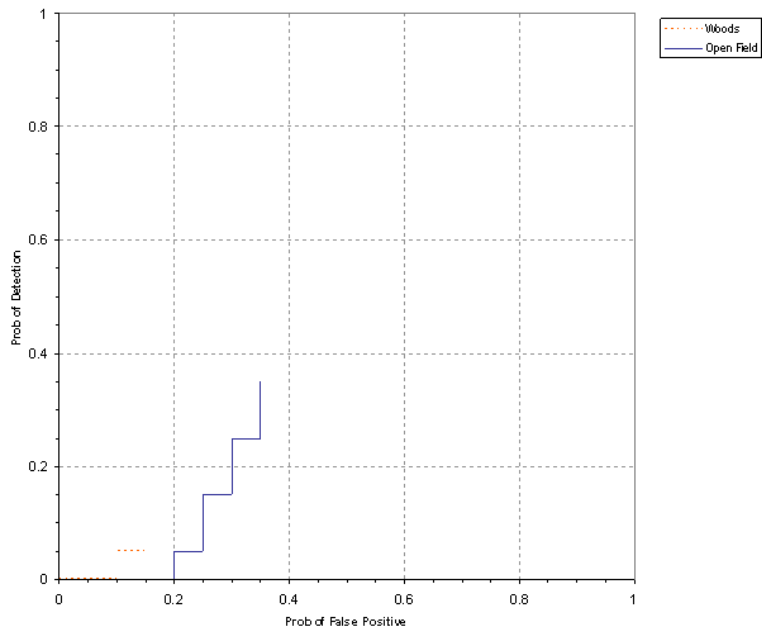


Figure 7. MAG G843/sling  $P_d^{\text{disc}}$  versus the respective  $P_{\text{fp}}$  over all ordnance categories combined.

### 6.3 COMPARISON OF ROC CURVES USING ORDNANCE LARGER THAN 20 MM

The  $P_d^{\text{res}}$  versus the respective probability of  $P_{\text{fp}}$  over ordnance larger than 20 mm are shown in Figure 8. The  $P_d^{\text{disc}}$  versus the respective  $P_{\text{fp}}$  over ordnance larger than 20 mm is shown in Figure 9. The uses of horizontal lines to illustrate the performance of the demonstrator at the recommended discrimination threshold levels, defining the subset of targets the demonstrator would recommend digging based on discrimination as shown in Figure 9.

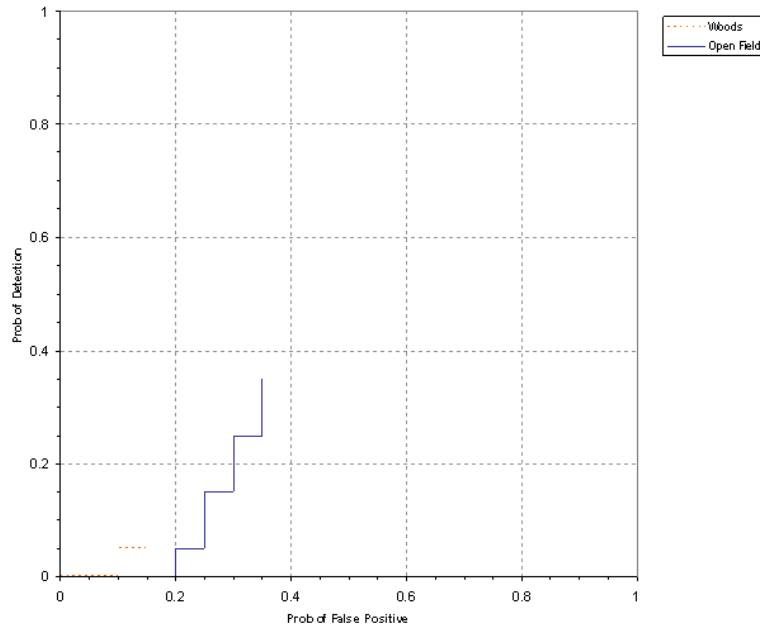


Figure 8. MAG G843/sling  $P_d^{\text{res}}$  versus the respective  $P_{\text{fp}}$  for ordnance larger than 20 mm.

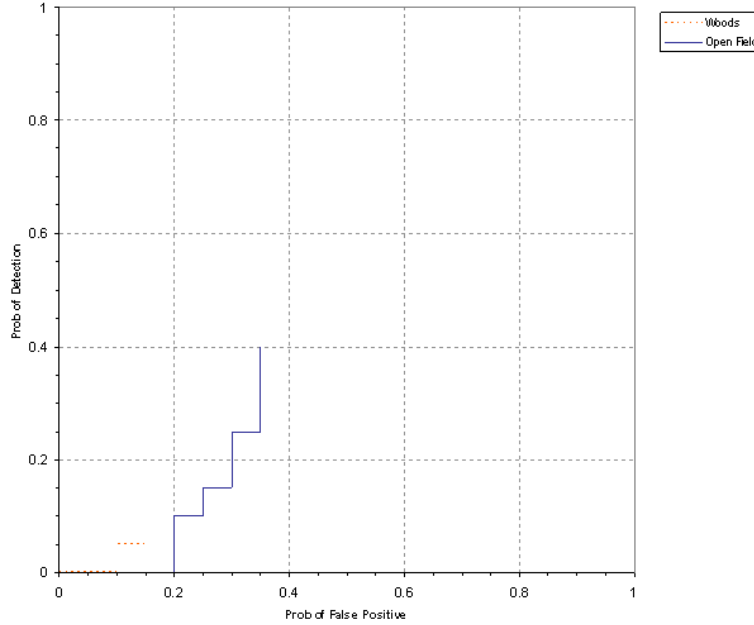


Figure 9. MAG G843/sling  $P_d^{disc}$  versus the respective  $P_{fp}$  for ordnance larger than 20 mm.

## 6.4 STATISTICAL COMPARISONS

Statistical Chi-square significance tests were used to compare results between the open field and wooded area scenarios. The intent of the comparison is to determine if the feature introduced in each scenario has a degrading effect on the performance of the sensor system. However, any modifications in the UXO sensor system during the test, like changes in the processing or changes in the selection of the operating threshold, will also contribute to performance differences.

The Chi-square test for comparison between ratios was used at a significance level of 0.05 to compare open field to wooded area with regard to  $P_d^{res}$ ,  $P_d^{disc}$ ,  $P_{fp}^{res}$  and  $P_{fp}^{disc}$ , Efficiency and Rejection Rate. These results are presented in Table 11. A detailed explanation and example of the Chi-square application is located in Appendix A.



**TABLE 11. CHI-SQUARE RESULTS - OPEN FIELD VERSUS WOODS**

| <b>Metric</b>   | <b>Small</b>    | <b>Medium</b>   | <b>Large</b>    | <b>Overall</b>  |
|-----------------|-----------------|-----------------|-----------------|-----------------|
| $P_d^{res}$     | Significant     | Significant     | Significant     | Significant     |
| $P_d^{disc}$    | Not significant | Not significant | Not significant | Significant     |
| $P_{fp}^{res}$  | -               | -               | -               | Significant     |
| $P_{fp}^{disc}$ | -               | -               | -               | Significant     |
| Efficiency      | -               | -               | -               | Not Significant |
| Rejection rate  | -               | -               | -               | Significant     |

## **SECTION 7. APPENDIXES**

### **APPENDIX A. TERMS AND DEFINITIONS**

#### **GENERAL DEFINITIONS**

**Anomaly:** Location of a system response deemed to warrant further investigation by the demonstrator for consideration as an emplaced ordnance item.

**Detection:** An anomaly location that is within  $R_{\text{halo}}$  of an emplaced ordnance item.

**Munitions and Explosives Of Concern (MEC):** Specific categories of military munitions that may pose unique explosive safety risks, including UXO as defined in 10 USC 101(e)(5), DMM as defined in 10 USC 2710(e)(2) and/or munitions constituents (e.g. TNT, RDX) as defined in 10 USC 2710(e)(3) that are present in high enough concentrations to pose an explosive hazard.

**Emplaced Ordnance:** An ordnance item buried by the government at a specified location in the test site.

**Emplaced Clutter:** A clutter item (i.e., non-ordnance item) buried by the government at a specified location in the test site.

**$R_{\text{halo}}$ :** A pre-determined radius about the periphery of an emplaced item (clutter or ordnance) within which a location identified by the demonstrator as being of interest is considered to be a response from that item. If multiple declarations lie within  $R_{\text{halo}}$  of any item (clutter or ordnance), the declaration with the highest signal output within the  $R_{\text{halo}}$  will be utilized. For the purpose of this program, a circular halo 0.5 meters in radius will be placed around the center of the object for all clutter and ordnance items less than 0.6 meters in length. When ordnance items are longer than 0.6 meters, the halo becomes an ellipse where the minor axis remains 1 meter and the major axis is equal to the length of the ordnance plus 1 meter.

**Small Ordnance:** Caliber of ordnance less than or equal to 40 mm (includes 20-mm projectile, 40-mm projectile, submunitions BLU-26, BLU-63, and M42).

**Medium Ordnance:** Caliber of ordnance greater than 40 mm and less than or equal to 81 mm (includes 57-mm projectile, 60-mm mortar, 2.75 in. Rocket, MK118 Rockeye, 81-mm mortar).

**Large Ordnance:** Caliber of ordnance greater than 81 mm (includes 105-mm HEAT, 105-mm projectile, 155-mm projectile, 500-pound bomb).

**Shallow:** Items buried less than 0.3 meter below ground surface.

**Medium:** Items buried greater than or equal to 0.3 meter and less than 1 meter below ground surface.

**Deep:** Items buried greater than or equal to 1 meter below ground surface.

**Response Stage Noise Level:** The level that represents the point below which anomalies are not considered detectable. Demonstrators are required to provide the recommended noise level for the blind grid test area.

**Discrimination Stage Threshold:** The demonstrator selected threshold level that they believe provides optimum performance of the system by retaining all detectable ordnance and rejecting the maximum amount of clutter. This level defines the subset of anomalies the demonstrator would recommend digging based on discrimination.

**Binomially Distributed Random Variable:** A random variable of the type which has only two possible outcomes, say success and failure, is repeated for  $n$  independent trials with the probability  $p$  of success and the probability  $1-p$  of failure being the same for each trial. The number of successes  $x$  observed in the  $n$  trials is an estimate of  $p$  and is considered to be a binomially distributed random variable.

## RESPONSE AND DISCRIMINATION STAGE DATA

The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection ( $P_d$ ) and the false alarms are reported as receiver operating characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive ( $P_{fp}$ ) and those that do not correspond to any known item, termed background alarms.

The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the RESPONSE STAGE, the demonstrator provides the scoring committee with the location and signal strength of all anomalies that the demonstrator has deemed sufficient to warrant further investigation and/or processing as potential emplaced ordnance items. This list is generated with minimal processing (e.g., this list will include all signals above the system noise threshold). As such, it represents the most inclusive list of anomalies.

The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such, and to reject clutter. For the same locations as in the RESPONSE STAGE anomaly list, the DISCRIMINATION STAGE list contains the output of the algorithms applied in the discrimination-stage processing. This list is prioritized based on the demonstrator's determination that an anomaly location is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For electronic signal processing, priority ranking is based on algorithm output. For other systems, priority ranking is based on human judgment. The demonstrator also selects the threshold that the demonstrator believes will provide "optimum" system performance, (i.e., that retains all the detected ordnance and rejects the maximum amount of clutter).

**Note:** The two lists provided by the demonstrator contain identical numbers of potential target locations. They differ only in the priority ranking of the declarations.

## RESPONSE STAGE DEFINITIONS

Response Stage Probability of Detection ( $P_d^{\text{res}}$ ):  $P_d^{\text{res}} = (\text{No. of response-stage detections})/(\text{No. of emplaced ordnance in the test site})$ .

Response Stage False Positive ( $fp^{\text{res}}$ ): An anomaly location that is within  $R_{\text{halo}}$  of an emplaced clutter item.

Response Stage Probability of False Positive ( $P_{fp}^{\text{res}}$ ):  $P_{fp}^{\text{res}} = (\text{No. of response-stage false positives})/(\text{No. of emplaced clutter items})$ .

Response Stage Background Alarm ( $ba^{\text{res}}$ ): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside  $R_{\text{halo}}$  of any emplaced ordnance or emplaced clutter item.

Response Stage Probability of Background Alarm ( $P_{ba}^{\text{res}}$ ): Blind Grid only:  $P_{ba}^{\text{res}} = (\text{No. of response-stage background alarms})/(\text{No. of empty grid locations})$ .

Response Stage Background Alarm Rate ( $BAR^{\text{res}}$ ): Open Field only:  $BAR^{\text{res}} = (\text{No. of response-stage background alarms})/(\text{arbitrary constant})$ .

Note that the quantities  $P_d^{\text{res}}$ ,  $P_{fp}^{\text{res}}$ ,  $P_{ba}^{\text{res}}$ , and  $BAR^{\text{res}}$  are functions of  $t^{\text{res}}$ , the threshold applied to the response-stage signal strength. These quantities can therefore be written as  $P_d^{\text{res}}(t^{\text{res}})$ ,  $P_{fp}^{\text{res}}(t^{\text{res}})$ ,  $P_{ba}^{\text{res}}(t^{\text{res}})$ , and  $BAR^{\text{res}}(t^{\text{res}})$ .

## DISCRIMINATION STAGE DEFINITIONS

Discrimination: The application of a signal processing algorithm or human judgment to response-stage data that discriminates ordnance from clutter. Discrimination should identify anomalies that the demonstrator has high confidence correspond to ordnance, as well as those that the demonstrator has high confidence correspond to non-ordnance or background returns. The former should be ranked with highest priority and the latter with lowest.

Discrimination Stage Probability of Detection ( $P_d^{\text{disc}}$ ):  $P_d^{\text{disc}} = (\text{No. of discrimination-stage detections})/(\text{No. of emplaced ordnance in the test site})$ .

Discrimination Stage False Positive ( $fp^{\text{disc}}$ ): An anomaly location that is within  $R_{\text{halo}}$  of an emplaced clutter item.

Discrimination Stage Probability of False Positive ( $P_{fp}^{\text{disc}}$ ):  $P_{fp}^{\text{disc}} = (\text{No. of discrimination stage false positives})/(\text{No. of emplaced clutter items})$ .

Discrimination Stage Background Alarm ( $ba^{\text{disc}}$ ): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside  $R_{\text{halo}}$  of any emplaced ordnance or emplaced clutter item.

Discrimination Stage Probability of Background Alarm ( $P_{ba}^{disc}$ ):  $P_{ba}^{disc} = (\text{No. of discrimination-stage background alarms})/(\text{No. of empty grid locations})$ .

Discrimination Stage Background Alarm Rate ( $BAR^{disc}$ ):  $BAR^{disc} = (\text{No. of discrimination-stage background alarms})/(\text{arbitrary constant})$ .

Note that the quantities  $P_d^{disc}$ ,  $P_{fp}^{disc}$ ,  $P_{ba}^{disc}$ , and  $BAR^{disc}$  are functions of  $t^{disc}$ , the threshold applied to the discrimination-stage signal strength. These quantities can therefore be written as  $P_d^{disc}(t^{disc})$ ,  $P_{fp}^{disc}(t^{disc})$ ,  $P_{ba}^{disc}(t^{disc})$ , and  $BAR^{disc}(t^{disc})$ .

## RECEIVER-OPERATING CHARACTERISTIC (ROC) CURVES

ROC curves at both the response and discrimination stages can be constructed based on the above definitions. The ROC curves plot the relationship between  $P_d$  versus  $P_{fp}$  and  $P_d$  versus  $BAR$  or  $P_{ba}$  as the threshold applied to the signal strength is varied from its minimum ( $t_{min}$ ) to its maximum ( $t_{max}$ ) value.<sup>1</sup> Figure A-1 shows how  $P_d$  versus  $P_{fp}$  and  $P_d$  versus  $BAR$  are combined into ROC curves. Note that the “res” and “disc” superscripts have been suppressed from all the variables for clarity.

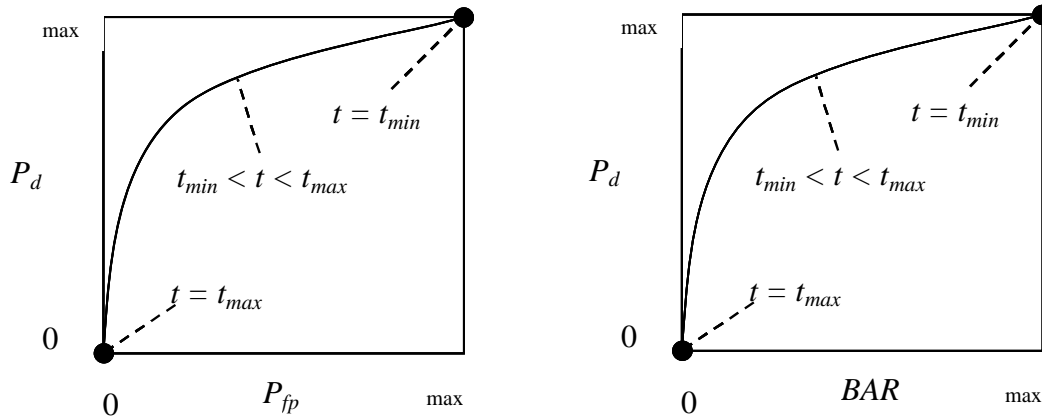


Figure A-1. ROC curves for open field testing. Each curve applies to both the response and discrimination stages.

<sup>1</sup>Strictly speaking, ROC curves plot the  $P_d$  versus  $P_{ba}$  over a pre-determined and fixed number of detection opportunities (some of the opportunities are located over ordnance and others are located over clutter or blank spots). In an open field scenario, each system suppresses its signal strength reports until some bare-minimum signal response is received by the system. Consequently, the open field ROC curves do not have information from low signal-output locations, and, furthermore, different contractors report their signals over a different set of locations on the ground. These ROC curves are thus not true to the strict definition of ROC curves as defined in textbooks on detection theory. Note, however, that the ROC curves obtained in the blind grid test sites are true ROC curves.

## METRICS TO CHARACTERIZE THE DISCRIMINATION STAGE

The demonstrator is also scored on efficiency and rejection ratio, which measure the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from non-ordnance items. The efficiency measures the amount of detected ordnance retained by the discrimination, while the rejection ratio measures the fraction of false alarms rejected. Both measures are defined relative to the entire response list, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.

Efficiency (E):  $E = P_d^{disc}(t^{disc})/P_d^{res}(t_{min}^{res})$ ; Measures (at a threshold of interest), the degree to which the maximum theoretical detection performance of the sensor system (as determined by the response stage  $t_{min}$ ) is preserved after application of discrimination techniques. Efficiency is a number between 0 and 1. An efficiency of 1 implies that all of the ordnance initially detected in the response stage was retained at the specified threshold in the discrimination stage,  $t^{disc}$ .

False Positive Rejection Rate ( $R_{fp}$ ):  $R_{fp} = 1 - [P_{fp}^{disc}(t^{disc})/P_{fp}^{res}(t_{min}^{res})]$ ; Measures (at a threshold of interest), the degree to which the sensor system's false positive performance is improved over the maximum false positive performance (as determined by the response stage  $t_{min}$ ). The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all emplaced clutter initially detected in the response stage were correctly rejected at the specified threshold in the discrimination stage.

Background Alarm Rejection Rate ( $R_{ba}$ ):

Blind grid:  $R_{ba} = 1 - [P_{ba}^{disc}(t^{disc})/P_{ba}^{res}(t_{min}^{res})]$ .

Open field:  $R_{ba} = 1 - [BAR^{disc}(t^{disc})/BAR^{res}(t_{min}^{res})]$ .

Measures the degree to which the discrimination stage correctly rejects background alarms initially detected in the response stage. The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all background alarms initially detected in the response stage were rejected at the specified threshold in the discrimination stage.

## CHI-SQUARE COMPARISON EXPLANATION:

The Chi-square test for differences in probabilities (or 2 x 2 contingency table) is used to analyze two samples drawn from two different populations to see if both populations have the same or different proportions of elements in a certain category. More specifically, two random samples are drawn, one from each population, to test the null hypothesis that the probability of event A (some specified event) is the same for both populations.

A 2 x 2 contingency table is used in the Standardized UXO Technology Demonstration Site Program to determine if there is reason to believe that the proportion of ordnance correctly detected/discriminated by demonstrator X's system is significantly degraded by the more challenging terrain feature introduced. The test statistic of the 2 x 2 contingency table is the

Chi-square distribution with one degree of freedom. Since an association between the more challenging terrain feature and relatively degraded performance is sought, a one-sided test is performed. A significance level of 0.05 is chosen which sets a critical decision limit of 2.71 from the Chi-square distribution with one degree of freedom. It is a critical decision limit because if the test statistic calculated from the data exceeds this value, the two proportions tested will be considered significantly different. If the test statistic calculated from the data is less than this value, the two proportions tested will be considered not significantly different.

An exception must be applied when either a 0 or 100 percent success rate occurs in the sample data. The Chi-square test cannot be used in these instances. Instead, Fischer's test is used and the critical decision limit for one-sided tests is the chosen significance level, which in this case is 0.05. With Fischer's test, if the test statistic is less than the critical value, the proportions are considered to be significantly different.

Standardized UXO Technology Demonstration Site examples, where blind grid results are compared to those from the open field and open field results are compared to those from one of the scenarios, follow. It should be noted that a significant result does not prove a cause and effect relationship exists between the two populations of interest; however, it does serve as a tool to indicate that one data set has experienced a degradation in system performance at a large enough level than can be accounted for merely by chance or random variation. Note also that a result that is not significant indicates that there is not enough evidence to declare that anything more than chance or random variation within the same population is at work between the two data sets being compared.

Demonstrator X achieves the following overall results after surveying each of the three progressively more difficult areas using the same system (results indicate the number of ordnance detected divided by the number of ordnance emplaced):

|                     | Blind grid    | Open field | Moguls      |
|---------------------|---------------|------------|-------------|
| $P_d^{\text{res}}$  | 100/100 = 1.0 | 8/10 = .80 | 20/33 = .61 |
| $P_d^{\text{disc}}$ | 80/100 = 0.80 | 6/10 = .60 | 8/33 = .24  |

$P_d^{\text{res}}$ : BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the response stage, all 100 ordnance out of 100 emplaced ordnance items were detected in the blind grid while 8 ordnance out of 10 emplaced were detected in the open field. Fischer's test must be used since a 100 percent success rate occurs in the data. Fischer's test uses the four input values to calculate a test statistic of 0.0075 that is compared against the critical value of 0.05. Since the test statistic is less than the critical value, the smaller response stage detection rate (0.80) is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the detection ability of demonstrator X's system seems to have been degraded in the open field relative to results from the blind grid using the same system.

$P_d^{disc}$ : BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the discrimination stage, 80 out of 100 emplaced ordnance items were correctly discriminated as ordnance in blind grid testing while 6 ordnance out of 10 emplaced were correctly discriminated as such in open field-testing. Those four values are used to calculate a test statistic of 1.12. Since the test statistic is less than the critical value of 2.71, the two discrimination stage detection rates are considered to be not significantly different at the 0.05 level of significance.

$P_d^{res}$ : OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the response stage, 8 out of 10 and 20 out of 33 are used to calculate a test statistic of 0.56. Since the test statistic is less than the critical value of 2.71, the two response stage detection rates are considered to be not significantly different at the 0.05 level of significance.

$P_d^{disc}$ : OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the discrimination stage, 6 out of 10 and 8 out of 33 are used to calculate a test statistic of 2.98. Since the test statistic is greater than the critical value of 2.71, the smaller discrimination stage detection rate is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the ability of demonstrator X to correctly discriminate seems to have been degraded by the mogul terrain relative to results from the flat open field using the same system.



## APPENDIX B. DAILY WEATHER LOGS

| Date, 06      | Time, EST | Average<br>Temperature, °F | Total Precipitation,<br>in. |
|---------------|-----------|----------------------------|-----------------------------|
| <b>30 Jan</b> | 0700      | 33.5                       | 0.01                        |
| 30 Jan        | 0800      | 34.4                       | 0.00                        |
| 30 Jan        | 0900      | 37.3                       | 0.00                        |
| 30 Jan        | 1000      | 40.9                       | 0.00                        |
| 30 Jan        | 1100      | 43.9                       | 0.00                        |
| 30 Jan        | 1200      | 47.2                       | 0.00                        |
| 30 Jan        | 1300      | 48.9                       | 0.00                        |
| 30 Jan        | 1400      | 52.5                       | 0.00                        |
| 30 Jan        | 1500      | 56.2                       | 0.00                        |
| 30 Jan        | 1600      | 57.8                       | 0.00                        |
| 30 Jan        | 1700      | 56.3                       | 0.00                        |
| <b>31 Jan</b> | 0700      | 44.5                       | 0.00                        |
| 31 Jan        | 0800      | 44.2                       | 0.00                        |
| 31 Jan        | 0900      | 43.8                       | 0.00                        |
| 31 Jan        | 1000      | 44.0                       | 0.00                        |
| 31 Jan        | 1100      | 45.7                       | 0.00                        |
| 31 Jan        | 1200      | 45.3                       | 0.00                        |
| 31 Jan        | 1300      | 46.0                       | 0.00                        |
| 31 Jan        | 1400      | 46.7                       | 0.00                        |
| 31 Jan        | 1500      | 46.4                       | 0.00                        |
| 31 Jan        | 1600      | 45.5                       | 0.00                        |
| 31 Jan        | 1700      | 45.2                       | 0.00                        |
| <b>1 Feb</b>  | 0700      | 38.4                       | 0.00                        |
| 1 Feb         | 0800      | 38.5                       | 0.00                        |
| 1 Feb         | 0900      | 38.9                       | 0.00                        |
| 1 Feb         | 1000      | 39.7                       | 0.00                        |
| 1 Feb         | 1100      | 40.4                       | 0.00                        |
| 1 Feb         | 1200      | 41.0                       | 0.00                        |
| 1 Feb         | 1300      | 42.1                       | 0.00                        |
| 1 Feb         | 1400      | 43.2                       | 0.00                        |
| 1 Feb         | 1500      | 44.6                       | 0.00                        |
| 1 Feb         | 1600      | 43.6                       | 0.00                        |
| 1 Feb         | 1700      | 41.9                       | 0.00                        |

| <b>Date, 06</b> | <b>Time, EST</b> | <b>Average<br/>Temperature, °F</b> | <b>Total Precipitation,<br/>in.</b> |
|-----------------|------------------|------------------------------------|-------------------------------------|
| <b>2 Feb</b>    | 0700             | 30.0                               | 0.00                                |
| 2 Feb           | 0800             | 31.5                               | 0.00                                |
| 2 Feb           | 0900             | 35.9                               | 0.00                                |
| 2 Feb           | 1000             | 42.1                               | 0.00                                |
| 2 Feb           | 1100             | 45.4                               | 0.00                                |
| 2 Feb           | 1200             | 48.1                               | 0.00                                |
| 2 Feb           | 1300             | 50.5                               | 0.00                                |
| 2 Feb           | 1400             | 52.7                               | 0.00                                |
| 2 Feb           | 1500             | 54.3                               | 0.00                                |
| 2 Feb           | 1600             | 54.0                               | 0.00                                |
| 2 Feb           | 1700             | 53.5                               | 0.00                                |
| <b>3 Feb</b>    | 0700             | 58.3                               | 0.00                                |
| 3 Feb           | 0800             | 58.0                               | 0.03                                |
| 3 Feb           | 0900             | 54.3                               | 0.01                                |
| 3 Feb           | 1000             | 54.3                               | 0.00                                |
| 3 Feb           | 1100             | 56.3                               | 0.00                                |
| 3 Feb           | 1200             | 59.3                               | 0.00                                |
| 3 Feb           | 1300             | 60.8                               | 0.00                                |
| 3 Feb           | 1400             | 61.6                               | 0.00                                |
| 3 Feb           | 1500             | 62.1                               | 0.00                                |
| 3 Feb           | 1600             | 61.3                               | 0.00                                |
| 3 Feb           | 1700             | 62.0                               | 0.00                                |
| <b>4 Feb</b>    | 0700             | 44.7                               | 0.00                                |
| 4 Feb           | 0800             | 45.6                               | 0.00                                |
| 4 Feb           | 0900             | 46.9                               | 0.00                                |
| 4 Feb           | 1000             | 48.1                               | 0.00                                |
| 4 Feb           | 1100             | 49.3                               | 0.00                                |
| 4 Feb           | 1200             | 48.0                               | 0.01                                |
| 4 Feb           | 1300             | 47.4                               | 0.02                                |
| 4 Feb           | 1400             | 48.1                               | 0.14                                |
| 4 Feb           | 1500             | 47.8                               | 0.32                                |
| 4 Feb           | 1600             | 48.0                               | 0.18                                |
| 4 Feb           | 1700             | 48.3                               | 0.00                                |
| <b>5 Feb</b>    | 0700             | 38.0                               | 0.00                                |
| 5 Feb           | 0800             | 37.0                               | 0.00                                |
| 5 Feb           | 0900             | 39.7                               | 0.00                                |
| 5 Feb           | 1000             | 42.5                               | 0.00                                |
| 5 Feb           | 1100             | 43.0                               | 0.00                                |
| 5 Feb           | 1200             | 43.4                               | 0.00                                |
| 5 Feb           | 1300             | 44.3                               | 0.00                                |
| 5 Feb           | 1400             | 43.9                               | 0.00                                |
| 5 Feb           | 1500             | 44.1                               | 0.00                                |
| 5 Feb           | 1600             | 43.6                               | 0.00                                |
| 5 Feb           | 1700             | 42.8                               | 0.00                                |

| <b>Date, 06</b> | <b>Time, EST</b> | <b>Average<br/>Temperature, °F</b> | <b>Total Precipitation,<br/>in.</b> |
|-----------------|------------------|------------------------------------|-------------------------------------|
| <b>6 Feb</b>    | 0700             | 33.0                               | 0.00                                |
| 6 Feb           | 0800             | 33.9                               | 0.00                                |
| 6 Feb           | 0900             | 35.2                               | 0.00                                |
| 6 Feb           | 1000             | 36.4                               | 0.00                                |
| 6 Feb           | 1100             | 37.2                               | 0.00                                |
| 6 Feb           | 1200             | 38.7                               | 0.00                                |
| 6 Feb           | 1300             | 40.2                               | 0.00                                |
| 6 Feb           | 1400             | 41.5                               | 0.00                                |
| 6 Feb           | 1500             | 43.2                               | 0.00                                |
| 6 Feb           | 1600             | 44.4                               | 0.00                                |
| 6 Feb           | 1700             | 43.9                               | 0.00                                |
| <b>7 Feb</b>    | 0700             | 30.9                               | 0.00                                |
| 7 Feb           | 0800             | 30.2                               | 0.00                                |
| 7 Feb           | 0900             | 33.8                               | 0.00                                |
| 7 Feb           | 1000             | 35.4                               | 0.00                                |
| 7 Feb           | 1100             | 37.0                               | 0.00                                |
| 7 Feb           | 1200             | 38.5                               | 0.00                                |
| 7 Feb           | 1300             | 39.8                               | 0.00                                |
| 7 Feb           | 1400             | 41.0                               | 0.00                                |
| 7 Feb           | 1500             | 41.6                               | 0.00                                |
| 7 Feb           | 1600             | 41.6                               | 0.00                                |
| 7 Feb           | 1700             | 40.4                               | 0.00                                |
| <b>8 Feb</b>    | 0700             | 25.9                               | 0.00                                |
| 8 Feb           | 0800             | 25.3                               | 0.00                                |
| 8 Feb           | 0900             | 29.9                               | 0.00                                |
| 8 Feb           | 1000             | 33.0                               | 0.00                                |
| 8 Feb           | 1100             | 35.0                               | 0.00                                |
| 8 Feb           | 1200             | 34.9                               | 0.00                                |
| 8 Feb           | 1300             | 36.0                               | 0.00                                |
| 8 Feb           | 1400             | 35.4                               | 0.00                                |
| 8 Feb           | 1500             | 36.3                               | 0.00                                |
| 8 Feb           | 1600             | 36.3                               | 0.00                                |
| 8 Feb           | 1700             | 35.3                               | 0.00                                |
| <b>9 Feb</b>    | 0700             | 26.4                               | 0.00                                |
| 9 Feb           | 0800             | 27.1                               | 0.00                                |
| 9 Feb           | 0900             | 29.1                               | 0.00                                |
| 9 Feb           | 1000             | 30.5                               | 0.00                                |
| 9 Feb           | 1100             | 32.1                               | 0.00                                |
| 9 Feb           | 1200             | 33.5                               | 0.00                                |
| 9 Feb           | 1300             | 35.1                               | 0.00                                |
| 9 Feb           | 1400             | 36.2                               | 0.00                                |
| 9 Feb           | 1500             | 37.0                               | 0.00                                |
| 9 Feb           | 1600             | 37.5                               | 0.00                                |
| 9 Feb           | 1700             | 36.7                               | 0.00                                |

| <b>Date, 06</b> | <b>Time, EST</b> | <b>Average<br/>Temperature, °F</b> | <b>Total Precipitation,<br/>in.</b> |
|-----------------|------------------|------------------------------------|-------------------------------------|
| <b>10 Feb</b>   | 0700             | 28.3                               | 0.00                                |
| 10 Feb          | 0800             | 28.8                               | 0.00                                |
| 10 Feb          | 0900             | 30.6                               | 0.00                                |
| 10 Feb          | 1000             | 33.1                               | 0.00                                |
| 10 Feb          | 1100             | 35.8                               | 0.00                                |
| 10 Feb          | 1200             | 37.5                               | 0.00                                |
| 10 Feb          | 1300             | 38.0                               | 0.00                                |
| 10 Feb          | 1400             | 38.1                               | 0.00                                |
| 10 Feb          | 1500             | 38.8                               | 0.00                                |
| 10 Feb          | 1600             | 39.4                               | 0.00                                |
| 10 Feb          | 1700             | 39.1                               | 0.00                                |
| <b>11 Feb</b>   | 0700             | 33.4                               | 0.00                                |
| 11 Feb          | 0800             | 33.7                               | 0.00                                |
| 11 Feb          | 0900             | 35.1                               | 0.00                                |
| 11 Feb          | 1000             | 36.7                               | 0.00                                |
| 11 Feb          | 1100             | 38.7                               | 0.00                                |
| 11 Feb          | 1200             | 39.8                               | 0.00                                |
| 11 Feb          | 1300             | 40.3                               | 0.00                                |
| 11 Feb          | 1400             | 38.1                               | 0.00                                |
| 11 Feb          | 1500             | 35.4                               | 0.00                                |
| 11 Feb          | 1600             | 34.1                               | 0.00                                |
| 11 Feb          | 1700             | 33.1                               | 0.01                                |
| <b>12 Feb</b>   | 0700             | 26.7                               | 0.00                                |
| 12 Feb          | 0800             | 26.4                               | 0.00                                |
| 12 Feb          | 0900             | 26.5                               | 0.00                                |
| 12 Feb          | 1000             | 27.1                               | 0.00                                |
| 12 Feb          | 1100             | 29.1                               | 0.00                                |
| 12 Feb          | 1200             | 29.8                               | 0.01                                |
| 12 Feb          | 1300             | 30.5                               | 0.02                                |
| 12 Feb          | 1400             | 31.7                               | 0.02                                |
| 12 Feb          | 1500             | 33.4                               | 0.03                                |
| 12 Feb          | 1600             | 34.3                               | 0.02                                |
| 12 Feb          | 1700             | 33.9                               | 0.01                                |
| <b>13 Feb</b>   | 0700             | 17.3                               | 0.00                                |
| 13 Feb          | 0800             | 17.9                               | 0.00                                |
| 13 Feb          | 0900             | 22.5                               | 0.00                                |
| 13 Feb          | 1000             | 26.8                               | 0.00                                |
| 13 Feb          | 1100             | 30.9                               | 0.00                                |
| 13 Feb          | 1200             | 33.6                               | 0.01                                |
| 13 Feb          | 1300             | 35.4                               | 0.01                                |
| 13 Feb          | 1400             | 36.5                               | 0.04                                |
| 13 Feb          | 1500             | 36.2                               | 0.02                                |
| 13 Feb          | 1600             | 35.6                               | 0.01                                |
| 13 Feb          | 1700             | 35.6                               | 0.00                                |

| <b>Date, 06</b> | <b>Time, EST</b> | <b>Average<br/>Temperature, °F</b> | <b>Total Precipitation,<br/>in.</b> |
|-----------------|------------------|------------------------------------|-------------------------------------|
| <b>14 Feb</b>   | 0700             | 17.9                               | 0.00                                |
| 14 Feb          | 0800             | 20.2                               | 0.00                                |
| 14 Feb          | 0900             | 26.8                               | 0.00                                |
| 14 Feb          | 1000             | 31.9                               | 0.00                                |
| 14 Feb          | 1100             | 37.0                               | 0.01                                |
| 14 Feb          | 1200             | 39.2                               | 0.03                                |
| 14 Feb          | 1300             | 40.5                               | 0.03                                |
| 14 Feb          | 1400             | 41.1                               | 0.02                                |
| 14 Feb          | 1500             | 41.3                               | 0.01                                |
| 14 Feb          | 1600             | 41.4                               | 0.00                                |
| 14 Feb          | 1700             | 41.4                               | 0.00                                |
| <b>15 Feb</b>   | 0700             | 23.5                               | 0.00                                |
| 15 Feb          | 0800             | 24.7                               | 0.00                                |
| 15 Feb          | 0900             | 33.6                               | 0.00                                |
| 15 Feb          | 1000             | 40.0                               | 0.00                                |
| 15 Feb          | 1100             | 49.3                               | 0.00                                |
| 15 Feb          | 1200             | 48.6                               | 0.00                                |
| 15 Feb          | 1300             | 48.1                               | 0.00                                |
| 15 Feb          | 1400             | 48.9                               | 0.00                                |
| 15 Feb          | 1500             | 50.5                               | 0.00                                |
| 15 Feb          | 1600             | 50.5                               | 0.17                                |
| 15 Feb          | 1700             | 50.6                               | 0.00                                |
| <b>16 Feb</b>   | 0700             | 28.9                               | 0.00                                |
| 16 Feb          | 0800             | 29.6                               | 0.00                                |
| 16 Feb          | 0900             | 37.8                               | 0.00                                |
| 16 Feb          | 1000             | 44.5                               | 0.00                                |
| 16 Feb          | 1100             | 49.8                               | 0.00                                |
| 16 Feb          | 1200             | 51.4                               | 0.00                                |
| 16 Feb          | 1300             | 52.7                               | 0.00                                |
| 16 Feb          | 1400             | 54.9                               | 0.00                                |
| 16 Feb          | 1500             | 56.9                               | 0.00                                |
| 16 Feb          | 1600             | 60.7                               | 0.00                                |
| 16 Feb          | 1700             | 56.4                               | 0.00                                |
| <b>17 Feb</b>   | 0700             | 54.5                               | 0.00                                |
| 17 Feb          | 0800             | 54.4                               | 0.01                                |
| 17 Feb          | 0900             | 52.3                               | 0.00                                |
| 17 Feb          | 1000             | 55.1                               | 0.00                                |
| 17 Feb          | 1100             | 58.7                               | 0.00                                |
| 17 Feb          | 1200             | 57.2                               | 0.00                                |
| 17 Feb          | 1300             | 53.3                               | 0.00                                |
| 17 Feb          | 1400             | 51.7                               | 0.00                                |
| 17 Feb          | 1500             | 50.5                               | 0.00                                |
| 17 Feb          | 1600             | 49.4                               | 0.00                                |
| 17 Feb          | 1700             | 48.3                               | 0.00                                |

## APPENDIX C. SOIL MOISTURE

| <b>Date:</b> 30 January 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1100 through 1600 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            | 3.4                  | 3.3                  |
|                                 | 6 to 12           | 16.8                 | 16.9                 |
|                                 | 12 to 24          | 24.8                 | 24.5                 |
|                                 | 24 to 36          | 29.2                 | 29.1                 |
|                                 | 36 to 48          | 31.7                 | 31.6                 |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 31 January 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1400 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            | 3.2                  | 3.2                  |
|                                 | 6 to 12           | 16.7                 | 16.6                 |
|                                 | 12 to 24          | 24.6                 | 24.7                 |
|                                 | 24 to 36          | 29.5                 | 29.7                 |
|                                 | 36 to 48          | 31.4                 | 31.3                 |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 1 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1400 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            | 3.2                  | 3.2                  |
|                                 | 6 to 12           | 16.7                 | 16.6                 |
|                                 | 12 to 24          | 24.6                 | 24.7                 |
|                                 | 24 to 36          | 29.5                 | 29.7                 |
|                                 | 36 to 48          | 31.4                 | 31.3                 |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |



| <b>Date:</b> 2 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1500 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            | 5.8                  | 5.7                  |
|                                 | 6 to 12           | 12.9                 | 13.1                 |
|                                 | 12 to 24          | 16.4                 | 16.5                 |
|                                 | 24 to 36          | 21.9                 | 21.8                 |
|                                 | 36 to 48          | 30.2                 | 30.7                 |

| <b>Date:</b> 3 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1400 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            | 2.8                  | 2.7                  |
|                                 | 6 to 12           | 16.5                 | 16.6                 |
|                                 | 12 to 24          | 24.2                 | 24.4                 |
|                                 | 24 to 36          | 29.8                 | 29.6                 |
|                                 | 36 to 48          | 31.2                 | 31.4                 |
| Blind grid/moguls               | 0 to 6            | 5.9                  | 5.8                  |
|                                 | 6 to 12           | 13.8                 | 13.7                 |
|                                 | 12 to 24          | 16.9                 | 16.7                 |
|                                 | 24 to 36          | 21.4                 | 21.5                 |
|                                 | 36 to 48          | 30.5                 | 30.5                 |

| <b>Date:</b> 6 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1400 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 4.9                  | 4.7                  |
|                                 | 6 to 12           | 8.8                  | 8.7                  |
|                                 | 12 to 24          | 16.8                 | 16.9                 |
|                                 | 24 to 36          | 4.8                  | 4.7                  |
|                                 | 36 to 48          | 4.6                  | 4.5                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 5.8                  | 5.7                  |
|                                 | 6 to 12           | 6.9                  | 6.4                  |
|                                 | 12 to 24          | 4.7                  | 4.6                  |
|                                 | 24 to 36          | 12.5                 | 12.6                 |
|                                 | 36 to 48          | 22.9                 | 22.7                 |
| Calibration lanes               | 0 to 6            | 2.9                  | 2.8                  |
|                                 | 6 to 12           | 16.2                 | 16.1                 |
|                                 | 12 to 24          | 24.1                 | 24.3                 |
|                                 | 24 to 36          | 29.5                 | 29.4                 |
|                                 | 36 to 48          | 31.6                 | 31.7                 |
| Blind grid/moguls               | 0 to 6            | 5.6                  | 5.5                  |
|                                 | 6 to 12           | 13.9                 | 13.7                 |
|                                 | 12 to 24          | 16.4                 | 16.6                 |
|                                 | 24 to 36          | 21.2                 | 21.3                 |
|                                 | 36 to 48          | 30.7                 | 30.8                 |

| <b>Date:</b> 7 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1700 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 4.6                  | 4.6                  |
|                                 | 6 to 12           | 8.9                  | 8.8                  |
|                                 | 12 to 24          | 16.6                 | 16.9                 |
|                                 | 24 to 36          | 4.5                  | 4.4                  |
|                                 | 36 to 48          | 4.3                  | 4.2                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 5.9                  | 5.8                  |
|                                 | 6 to 12           | 6.7                  | 6.6                  |
|                                 | 12 to 24          | 4.5                  | 4.4                  |
|                                 | 24 to 36          | 12.8                 | 12.7                 |
|                                 | 36 to 48          | 22.5                 | 22.4                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 8 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1330 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 4.4                  | 4.3                  |
|                                 | 6 to 12           | 8.6                  | 8.7                  |
|                                 | 12 to 24          | 16.5                 | 16.2                 |
|                                 | 24 to 36          | 4.7                  | 4.5                  |
|                                 | 36 to 48          | 4.1                  | 4.0                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 5.6                  | 5.5                  |
|                                 | 6 to 12           | 6.9                  | 6.4                  |
|                                 | 12 to 24          | 4.7                  | 4.6                  |
|                                 | 24 to 36          | 12.9                 | 12.5                 |
|                                 | 36 to 48          | 22.2                 | 22.3                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            | 5.9                  | 5.8                  |
|                                 | 6 to 12           | 13.5                 | 13.5                 |
|                                 | 12 to 24          | 16.5                 | 16.6                 |
|                                 | 24 to 36          | 21.0                 | 20.8                 |
|                                 | 36 to 48          | 30.5                 | 30.4                 |

| <b>Date:</b> 9 February 2006    |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1530 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            | 8.7                  | 8.6                  |
|                                 | 6 to 12           | 11.2                 | 11.4                 |
|                                 | 12 to 24          | 13.9                 | 13.8                 |
|                                 | 24 to 36          | 19.5                 | 19.7                 |
|                                 | 36 to 48          | 19.6                 | 20.1                 |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            | 5.7                  | 5.6                  |
|                                 | 6 to 12           | 13.1                 | 13.3                 |
|                                 | 12 to 24          | 16.4                 | 16.3                 |
|                                 | 24 to 36          | 20.5                 | 20.4                 |
|                                 | 36 to 48          | 30.3                 | 30.4                 |

| <b>Date:</b> 10 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1645 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            | 8.4                  | 8.3                  |
|                                 | 6 to 12           | 11.8                 | 11.7                 |
|                                 | 12 to 24          | 13.4                 | 13.6                 |
|                                 | 24 to 36          | 19.4                 | 19.5                 |
|                                 | 36 to 48          | 19.7                 | 19.9                 |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 11 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0800 through 1400 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 5.9                  | 5.8                  |
|                                 | 6 to 12           | 8.4                  | 8.2                  |
|                                 | 12 to 24          | 16.4                 | 16.3                 |
|                                 | 24 to 36          | 4.9                  | 4.6                  |
|                                 | 36 to 48          | 4.2                  | 4.1                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 5.4                  | 5.7                  |
|                                 | 6 to 12           | 6.8                  | 6.5                  |
|                                 | 12 to 24          | 4.9                  | 4.7                  |
|                                 | 24 to 36          | 12.7                 | 12.6                 |
|                                 | 36 to 48          | 22.4                 | 22.4                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |



| <b>Date:</b> 13 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1500 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 7.2                  | 7.5                  |
|                                 | 6 to 12           | 10.5                 | 10.9                 |
|                                 | 12 to 24          | 16.9                 | 17.2                 |
|                                 | 24 to 36          | 5.8                  | 6.2                  |
|                                 | 36 to 48          | 8.4                  | 8.3                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 8.1                  | 8.4                  |
|                                 | 6 to 12           | 7.4                  | 7.2                  |
|                                 | 12 to 24          | 6.8                  | 6.9                  |
|                                 | 24 to 36          | 13.5                 | 13.8                 |
|                                 | 36 to 48          | 21.8                 | 21.9                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 14 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1530 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Calibration lanes               | 0 to 6            | 6.8                  | 6.8                  |
|                                 | 6 to 12           | 17.8                 | 17.9                 |
|                                 | 12 to 24          | 26.4                 | 26.6                 |
|                                 | 24 to 36          | 29.8                 | 29.9                 |
|                                 | 36 to 48          | 31.1                 | 31.4                 |
| Blind grid/moguls               | 0 to 6            | 7.8                  | 7.7                  |
|                                 | 6 to 12           | 15.2                 | 15.8                 |
|                                 | 12 to 24          | 19.2                 | 19.4                 |
|                                 | 24 to 36          | 21.6                 | 21.2                 |
|                                 | 36 to 48          | 32.5                 | 32.4                 |

| <b>Date:</b> 15 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 1000 through 1330 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 8.2                  | 8.4                  |
|                                 | 6 to 12           | 12.8                 | 12.7                 |
|                                 | 12 to 24          | 18.5                 | 18.4                 |
|                                 | 24 to 36          | 9.2                  | 9.5                  |
|                                 | 36 to 48          | 8.8                  | 8.7                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 8.7                  | 8.9                  |
|                                 | 6 to 12           | 7.6                  | 7.4                  |
|                                 | 12 to 24          | 8.5                  | 8.6                  |
|                                 | 24 to 36          | 14.6                 | 14.5                 |
|                                 | 36 to 48          | 22.4                 | 22.5                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 16 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0900 through 1300 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 8.9                  | 8.8                  |
|                                 | 6 to 12           | 12.5                 | 12.9                 |
|                                 | 12 to 24          | 19.5                 | 19.4                 |
|                                 | 24 to 36          | 10.3                 | 10.5                 |
|                                 | 36 to 48          | 8.9                  | 9.2                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 8.5                  | 8.5                  |
|                                 | 6 to 12           | 7.8                  | 7.9                  |
|                                 | 12 to 24          | 8.4                  | 8.8                  |
|                                 | 24 to 36          | 14.3                 | 14.8                 |
|                                 | 36 to 48          | 23.4                 | 23.5                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| <b>Date:</b> 17 February 2006   |                   |                      |                      |
|---------------------------------|-------------------|----------------------|----------------------|
| <b>Times:</b> 0800 through 1640 |                   |                      |                      |
| <b>Probe location</b>           | <b>Layer, in.</b> | <b>AM Reading, %</b> | <b>PM Reading, %</b> |
| Wet area                        | 0 to 6            | 8.5                  | 8.4                  |
|                                 | 6 to 12           | 12.4                 | 12.3                 |
|                                 | 12 to 24          | 19.3                 | 19.2                 |
|                                 | 24 to 36          | 10.7                 | 10.6                 |
|                                 | 36 to 48          | 8.8                  | 8.7                  |
| Wooded area                     | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Open area                       | 0 to 6            | 8.8                  | 8.7                  |
|                                 | 6 to 12           | 8.2                  | 7.9                  |
|                                 | 12 to 24          | 8.7                  | 8.5                  |
|                                 | 24 to 36          | 14.9                 | 14.4                 |
|                                 | 36 to 48          | 24.7                 | 24.5                 |
| Calibration lanes               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |
| Blind grid/moguls               | 0 to 6            |                      |                      |
|                                 | 6 to 12           |                      |                      |
|                                 | 12 to 24          |                      |                      |
|                                 | 24 to 36          |                      |                      |
|                                 | 36 to 48          |                      |                      |

| Date     | No. of People | Area Tested       | Status Start Time | Status Stop Time | Duration, min. | Operational Status | Operational Status Comments                            | Track Method | Pattern | Field Conditions |
|----------|---------------|-------------------|-------------------|------------------|----------------|--------------------|--|--------------|---------|------------------|
| 2/3/2006 | 3             | CALIBRATION LANES | 1430              | 1700             | 150            | INITIAL SET-UP     |  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 740               | 825              | 45             | DAILY START, STOP  | EQUIPMENT SETUP  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 825               | 905              | 40             | CALIBRATION        |  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 905               | 935              | 30             | COLLECTING DATA    |  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 935               | 1035             | 60             | DAILY START, STOP  | EQUIPMENT SETUP<br>150 by 150 METER GRID               | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1035              | 1150             | 75             | COLLECTING DATA    | CALIBRATION, BLIND AND OPEN FIELD DATA BEING COLLECTED | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1150              | 1240             | 50             | BREAK/LUNCH        | CALIBRATION, BLIND AND OPEN FIELD DATA BEING COLLECTED | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1240              | 1340             | 60             | COLLECTING DATA    | CALIBRATION, BLIND AND OPEN FIELD DATA BEING COLLECTED | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1340              | 1510             | 90             | DAILY START, STOP  | EQUIPMENT SETUP<br>100 by 250 METER GRID               | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1510              | 1710             | 120            | COLLECTING DATA    |  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1710              | 1735             | 25             | CALIBRATION        |  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/6/2006 | 3             | OPEN FIELD        | 1735              | 1810             | 35             | DAILY START, STOP  | EQUIPMENT BREAKDOWN                                    | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/7/2006 | 3             | OPEN FIELD        | 845               | 1040             | 115            | DAILY START, STOP  | EQUIPMENT SETUP  | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/7/2006 | 3             | OPEN FIELD        | 1040              | 1150             | 70             | CALIBRATION        |  | RTS          | LINEAR  | SUNNY MUDDY      |

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

| Date     | No. of People | Area Tested | Status Start Time | Status Stop Time | Duration, min. | Operational Status                    | Operational Status Comments | Track Method | Pattern | Field Conditions |
|----------|---------------|-------------|-------------------|------------------|----------------|---------------------------------------|-----------------------------|--------------|---------|------------------|
| 2/7/2006 | 3             | OPEN FIELD  | 1150              | 1310             | 80             | BREAK/LUNCH                           |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/7/2006 | 3             | OPEN FIELD  | 1310              | 1715             | 245            | COLLECTING DATA                       | 100 by 250 METER GRID       | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/7/2006 | 3             | OPEN FIELD  | 1715              | 1740             | 25             | CALIBRATION                           |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/7/2006 | 3             | OPEN FIELD  | 1740              | 1805             | 25             | DAILY START, STOP                     | EQUIPMENT BREAKDOWN         | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 740               | 855              | 75             | DAILY START, STOP                     | EQUIPMENT SETUP             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 855               | 935              | 40             | CALIBRATION                           |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 935               | 1210             | 155            | COLLECTING DATA                       |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 1210              | 1250             | 40             | BREAK/LUNCH                           |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 1250              | 1420             | 90             | COLLECTING DATA                       |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | OPEN FIELD  | 1420              | 1500             | 40             | DAILY START, STOP                     | EQUIPMENT SETUP             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | MOGUL       | 1500              | 1550             | 50             | COLLECTING DATA                       |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | MOGUL       | 1550              | 1600             | 10             | DOWNTIME DUE TO EQUIPMENT MAINT/CHECK | CHANGE BATTERY              | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | MOGUL       | 1600              | 1615             | 15             | COLLECTING DATA                       |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | MOGUL       | 1615              | 1635             | 20             | CALIBRATION                           |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/8/2006 | 3             | MOGUL       | 1635              | 1725             | 50             | DAILY START, STOP                     | EQUIPMENT BREAKDOWN         | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/9/2006 | 3             | MOGUL       | 755               | 925              | 90             | DAILY START, STOP                     | EQUIPMENT SETUP             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/9/2006 | 3             | MOGUL       | 925               | 1010             | 45             | CALIBRATION                           |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006 | 3             | MOGUL       | 1010              | 1145             | 95             | COLLECTING DATA                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006 | 3             | MOGUL       | 1145              | 1240             | 55             | BREAK/LUNCH                           |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006 | 3             | MOGUL       | 1240              | 1300             | 20             | COLLECTING DATA                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |

| Date      | No. of People | Area Tested | Status Start Time | Status Stop Time | Duration, min. | Operational Status                | Operational Status Comments | Track Method | Pattern | Field Conditions |
|-----------|---------------|-------------|-------------------|------------------|----------------|-----------------------------------|-----------------------------|--------------|---------|------------------|
| 2/9/2006  | 3             | WOODED      | 1300              | 1505             | 125            | DAILY START, STOP                 | EQUIPMENT SETUP             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006  | 3             | WOODED      | 1505              | 1640             | 95             | COLLECTING DATA                   |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006  | 3             | WOODED      | 1640              | 1705             | 25             | CALIBRATION                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/9/2006  | 3             | WOODED      | 1705              | 1730             | 25             | DAILY START, STOP                 | EQUIPMENT BREAKDOWN         | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 740               | 835              | 55             | DAILY START, STOP                 | EQUIPMENT SETUP             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 835               | 915              | 40             | CALIBRATION                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 915               | 1135             | 140            | COLLECTING DATA                   |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 1135              | 1225             | 50             | BREAK/LUNCH                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 1225              | 1305             | 40             | DOWNTIME DUE TO EQUIP MAINT/CHECK | DATA CHECK                  | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 1305              | 1540             | 155            | COLLECTING DATA                   |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 1540              | 1605             | 25             | CALIBRATION                       |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/10/2006 | 3             | WOODED      | 1605              | 1630             | 25             | DAILY START, STOP                 | EQUIPMENT BREAKDOWN         | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/11/2006 | 3             | OPEN FIELD  | 800               | 910              | 70             | DAILY START, STOP                 | EQUIPMENT SETUP             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 910               | 945              | 35             | CALIBRATION                       |                             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 945               | 1340             | 235            | DAILY START, STOP                 | EQUIPMENT SETUP             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 1340              | 1420             | 40             | BREAK/LUNCH                       |                             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 1420              | 1615             | 115            | COLLECTING DATA                   |                             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 1615              | 1625             | 10             | CALIBRATION                       |                             | RTS          | LINEAR  | SNOW MUDDY       |
| 2/11/2006 | 3             | OPEN FIELD  | 1625              | 1650             | 25             | DAILY START, STOP                 | EQUIPMENT BREAKDOWN         | RTS          | LINEAR  | SNOW MUDDY       |

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.



| Date      | No. of People | Area Tested | Status Start Time | Status Stop Time | Duration, min. | Operational Status | Operational Status Comments | Track Method | Pattern | Field Conditions |
|-----------|---------------|-------------|-------------------|------------------|----------------|--------------------|-----------------------------|--------------|---------|------------------|
| 2/13/2006 | 3             | OPEN FIELD  | 750               | 920              | 90             | DAILY START, STOP  | EQUIPMENT SETUP             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/13/2006 | 3             | OPEN FIELD  | 920               | 945              | 25             | CALIBRATION        |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/13/2006 | 3             | OPEN FIELD  | 945               | 1125             | 100            | COLLECTING DATA    |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/13/2006 | 3             | OPEN FIELD  | 1125              | 1340             | 135            | CALIBRATION        |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/13/2006 | 3             | OPEN FIELD  | 1340              | 1420             | 40             | BREAK/LUNCH        |                             | RTS          | LINEAR  | CLOUDY MUDDY     |
| 2/17/2006 | 3             | OPEN FIELD  | 1340              | 1515             | 95             | DAILY START, STOP  | EQUIPMENT SETUP             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/17/2006 | 3             | OPEN FIELD  | 1515              | 1535             | 20             | CALIBRATION        |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/17/2006 | 3             | OPEN FIELD  | 1535              | 1700             | 85             | COLLECTING DATA    |                             | RTS          | LINEAR  | SUNNY MUDDY      |
| 2/17/2006 | 3             | OPEN FIELD  | 1700              | 1845             | 105            | DEMOBILIZATION     |                             | RTS          | LINEAR  | SUNNY MUDDY      |

D-4

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

## **APPENDIX E. REFERENCES**

1. Standardized UXO Technology Demonstration Site Handbook, DTC Project No. 8-CO-160-000-473, Report No. ATC-8349, March 2002.
2. Aberdeen Proving Ground Soil Survey Report, October 1998.
3. Data Summary, UXO Standardized Test Site: APG Soils Description, May 2002.
4. Yuma Proving Ground Soil Survey Report, May 2003.

## APPENDIX F. ABBREVIATIONS

|       |   |   |
|-------|---|---|
| μ     | = | standard deviation  |
| ADST  | = | Aberdeen Data Services Team   |
| APG   | = | Aberdeen Proving Ground   |
| ATC   | = | U.S. Army Aberdeen Test Center  |
| ATSS  | = | Aberdeen Test Support Services  |
| BAH   | = | Booz Allen Hamilton   |
| DMM   | = | discarded military munitions  |
| E     | = | efficiency  |
| EM    | = | electromagnetic   |
| EMI   | = | electromagnetic induction   |
| ERDC  | = | U.S. Army Corps of Engineers Engineer Research and Development Center |
| EST   | = | Eastern Standard Time   |
| ESTCP | = | Environmental Security Technology Certification Program               |
| EQT   | = | Army Environmental Quality Technology Program                         |
| HEAT  | = | high-explosive antitank   |
| IMU   | = | inertial measurement unit   |
| JPG   | = | Jefferson Proving Ground  |
| MEC   | = | munitions and explosives of concern                                   |
| METDC | = | Military Environmental Technology Demonstration Center                |
| NS    | = | nonstandard   |
| POC   | = | point of contact  |
| QA    | = | quality assurance   |
| QC    | = | quality control   |
| ROC   | = | receiver-operating characteristic                                     |
| RTK   | = | real-time kinematic   |
| RTS   | = | Robotic Total Station   |
| SERDP | = | Strategic Environmental Research and Development Program              |
| USAEC | = | U.S. Army Environmental Command                                       |
| UXO   | = | unexploded ordnance   |
| YPG   | = | U.S. Army Yuma Proving Ground   |

## APPENDIX G. DISTRIBUTION LIST

DTC Project No. 8-CO-160-UXO-021

| <u>Addressee</u>   | <u>No. of<br/>Copies</u> |
|--|--------------------------|
| Booz Allen Hamilton<br>ATTN: Mr. Patrick McDonnell<br>4692 Millennium Drive<br>Suite 200<br>Belcamp, MD 21017-1535 | 1                        |
| Sky Research, Inc.<br>ATTN: Ms. Stacey Kingsbury<br>445 Dead Indian Memorial Road<br>Ashland, OR 97520             | 1                        |
| Commander<br>U.S. Army Aberdeen Test Center<br>ATTN: TEDT-AT-SLE (Mr. J. Stephen McClung)<br>(Library)             | 1<br>1                   |
| 400 Colleran Road<br>Aberdeen Proving Ground, MD 21005-5059  |                          |
| Defense Technical Information Center<br>8725 John J. Kingman Road, Suite 0944<br>Fort Belvoir, VA 22060-6218       | PDF                      |

Secondary distribution is controlled by Commander, U.S. Army Environmental Command,  
ATTN: IMAE-RTA.